


## Fiber Core

6 x 19, 6 x S(19), 6 x Fi(25), 6 x WS(26) FC  
6 x 37, 6 x SeS(37), 6 x Fi(29), 6 x WS(31), 6 x WS(36) FC  
Improved Plow Steel

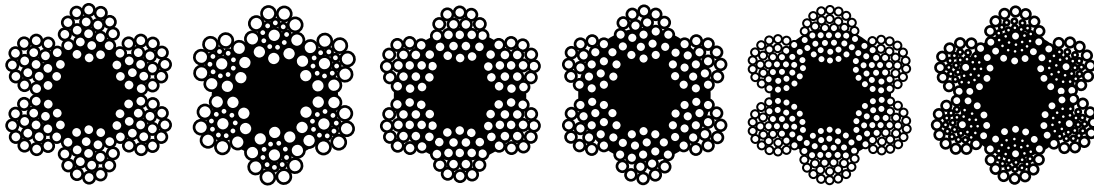

Rope Diameter		Nominal Breaking Strength		Approx. Weight
Nominal (min)	Maximum	Bright	Galvanized	
inches	inches	lb	lb	lb/ft
1/4	0.265	5,480	4,900	0.105
5/16	0.328	8,520	7,660	0.164
3/8	0.394	12,200	10,980	0.236
7/16	0.459	16,540	14,980	0.320
1/2	0.525	21,400	19,260	0.420
9/16	0.591	27,000	24,300	0.530
5/8	0.656	33,400	30,000	0.660
3/4	0.788	47,600	42,800	0.950
7/8	0.919	64,400	58,000	1.290
1	1.050	83,600	75,200	1.680
1 - 1/8	1.181	105,200	94,600	2.130
1 - 1/4	1.313	129,200	116,200	2.630
1 - 3/8	1.444	155,400	139,800	3.180

The nominal breaking strength for galvanized wire ropes above are based on either a hot galvanized or electro galvanized coating. Galvanized wire ropes are also available in EIPS uncoated and drawn galvanized on special order. EIPS drawn galvanized wire rope will offer the same minimum breaking strength as an uncoated wire rope.

• All Premium and standard quality imported ropes are RR-W-410, recent revision, as applicable.

\* Breaking strength listed for comparative purposes. Operating loads may vary, but NEVER exceed the recommended design factor of 20% of the Breaking strength.