


Vinyl Coated 7x19 and 7x7 Cable

GAC PVC CABLE

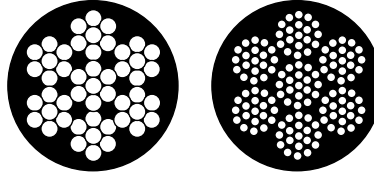

Improved Plow Steel

Diameter (in)		Weight						Breaking Strength
Inner Cable	Outer Cover	Inner Cable		PVC Coating		Total		
		lb/1000'	kg/1000'	lb/1000'	kg/1000'	lb/1000'	kg/1000'	
7 X 7 PVC								
1/16	3/32	7.5	3.40	2.2	1.02	9.7	4.42	480
1/16	1/8	7.5	3.40	5.4	2.45	12.9	5.85	480
3/32	1/8	16.0	7.26	3.1	1.43	19.1	8.69	920
3/32	5/32	16.0	7.26	7.2	3.26	23.2	10.52	920
1/8	5/32	28.5	12.93	4.1	1.84	32.6	4.7	1,700
1/8	3/16	28.5	12.93	9.0	4.06	37.5	16.99	1,700
3/16	1/4	62.0	28.12	12.6	5.70	74.6	33.82	3,700
3/16	5/16	62.0	28.12	28.8	13.05	90.8	41.17	3,700
7 X 19 PVC								
3/32	1/8	17.4	7.89	3.2	1.44	20.6	9.33	1,000
3/32	5/32	17.4	7.89	7.2	3.26	24.6	11.15	1,000
1/8	5/32	29.0	13.15	4.1	1.84	33.1	14.99	2,000
1/8	3/16	29.0	13.15	9.0	4.06	38.0	17.21	2,000
3/16	1/4	65.0	29.48	12.6	5.70	77.6	35.18	4,200
3/16	5/16	65.0	29.48	28.8	13.05	93.8	42.53	4,200
1/4	5/16	110.0	49.90	16.2	7.33	126.2	57.23	7,000
1/4	3/8	110.0	49.90	35.9	16.30	145.9	66.20	7,000
5/16	3/8	173.0	78.47	19.8	8.96	192.8	87.43	9,800
5/16	7/16	173.0	78.47	43.1	19.55	216.1	98.02	9,800
3/8	7/16	243.0	110.22	23.3	10.60	266.3	120.82	14,400

*Breaking strength listed for comparative purposes. Operating loads may vary, but NEVER exceed the recommended design factor of 20% of the Breaking strength.

