





Hardware

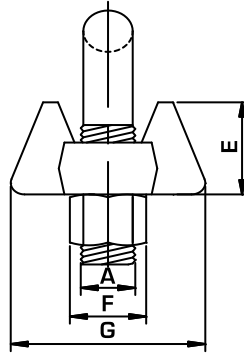


Drop Forged Wire Rope Clips

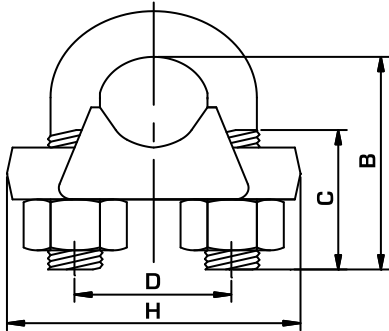

Hot Dip Galvanized forged steel.
Mechanical galvanized U-bolt and nuts.

Rope Size	Weight Per	Dimensions (in.)							
(in.)	100 (lbs.)	A	B	C	D	E	F	G	H
1/8	6	.22	.72	.44	.47	.37	.38	.81	.99
3/16	10	.25	.97	.56	.59	.50	.44	.94	1.18
1/4	19	.31	1.03	.50	.75	.66	.56	1.19	1.43
5/16	28	.38	1.38	.75	.88	.73	.69	1.31	1.66
3/8	48	.44	1.50	.75	1.00	.91	.75	1.63	1.94
7/16	78	.50	1.88	1.00	1.19	1.13	.88	1.91	2.28
1/2	80	.50	1.88	1.00	1.19	1.13	.88	1.91	2.28
9/16	109	.56	2.25	1.25	1.31	1.34	.94	2.06	2.50
5/8	110	.56	2.25	1.25	1.31	1.34	.94	2.06	2.50
3/4	142	.62	2.75	1.44	1.50	1.39	1.06	2.25	2.84
7/8	212	.75	3.12	1.62	1.75	1.58	1.25	2.44	3.16
1	252	.75	3.50	1.81	1.88	1.77	1.25	2.63	3.47
1-1/8	283	.75	3.88	2.00	2.00	1.91	1.25	2.81	3.59
1-1/4	438	.88	4.44	2.22	2.31	2.17	1.44	3.13	4.13
1-3/8	442	.88	4.44	2.22	2.38	2.31	1.44	3.13	4.19
1-1/2	544	.88	4.94	2.38	2.59	2.44	1.44	3.41	4.44
1-5/8	704	1.00	5.31	2.62	2.75	2.66	1.63	3.63	4.75
1-3/4	934	1.13	5.75	2.75	3.06	2.92	1.81	3.81	5.24
2	1300	1.25	6.44	3.00	3.38	3.28	2.00	4.44	5.88
2-1/4	1600	1.25	7.13	3.19	3.88	3.19	2.00	4.56	6.38
2-1/2	1900	1.25	7.69	3.44	4.13	3.69	2.00	4.05	6.63

Malleable Wire Rope Clips

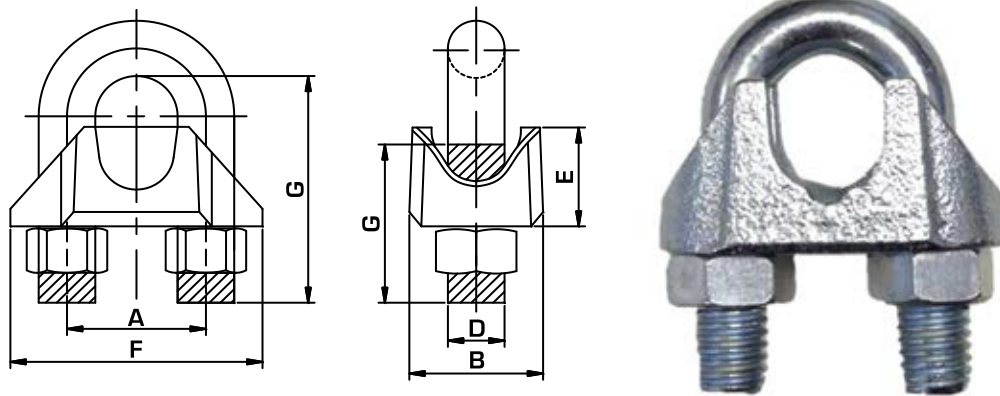

FF-C-450 Type 1 Class 2

Size (In)	Dimensions (in.)							Weight Per
	A	B	C	D	E	F	G	100 (lbs.)
1/16	1/16	.45	.45	0.15	.38	.69	.65	3
1/8	1/8	.55	.55	0.18	.42	.87	.79	4
3/16	3/16	.59	.63	0.25	.51	1.02	.94	6.3
1/4	1/4	.73	.79	0.31	.59	1.25	1.24	13
5/16	5/16	.79	.87	0.31	.63	1.38	1.34	15
3/8	3/8	.87	1.06	0.38	.87	1.59	1.65	21
7/16	7/16	.91	1.18	0.44	.87	1.70	1.69	37
1/2	1/2	1.02	1.38	0.44	.92	1.93	2.12	37
9/16	9/16	1.04	1.58	0.50	1.06	2.07	2.15	59
5/8	5/8	1.12	1.58	0.50	1.10	2.26	2.33	59
3/4	3/4	1.26	1.65	0.56	1.33	2.40	2.70	84
7/8	7/8	1.46	1.81	0.63	1.50	2.80	3.08	125
1	1	1.65	2.2	0.63	1.69	3.05	3.44	166
1 1/8	1 1/8	2.06	2.75	0.75	2.19	3.38	4.00	243

Electro Galvanized


Minimum number of malleable clips
to use based on rope size:

1/8" — 3/8" / 2 Clips

7/16" — 5/8" / 3 Clips

3/4" — 7/8" / 4 Clips



Full Grip Clips

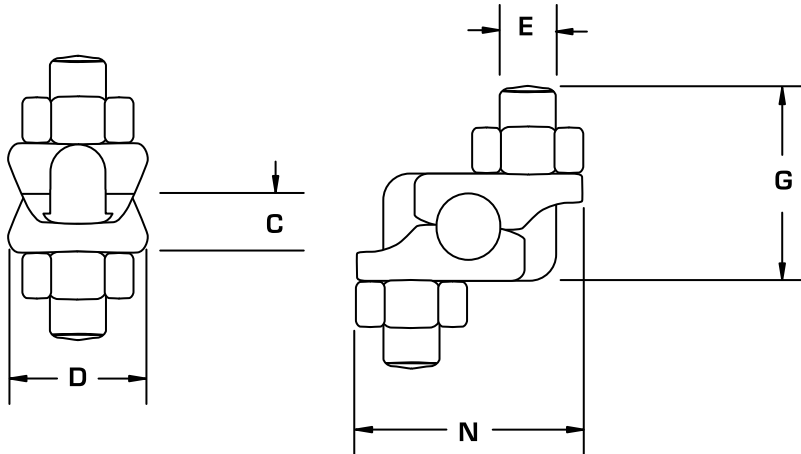

Rope Size	Weight Per	Dimensions (in.)				
(in.)	100 (lbs.)	C	D	E	N	G
3/16-1/4	23	.40	.94	.38	1.41	1.44
5/16	28	.47	1.06	.38	1.50	1.54
3/8	40	.51	1.06	.44	1.84	1.78
7/16-1/2	62	.59	1.25	.50	2.21	2.15
9/16-5/8	103	.72	1.50	.63	2.72	2.57
3/4	175	.86	1.81	.75	2.94	2.67
7/8	225	.97	2.12	.75	3.31	2.86
1	300	1.13	2.25	.75	3.72	3.06





Heavy Duty Thimbles

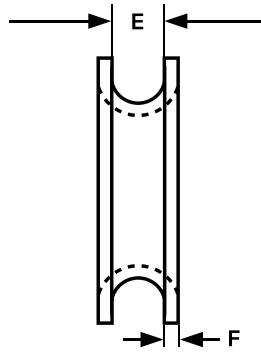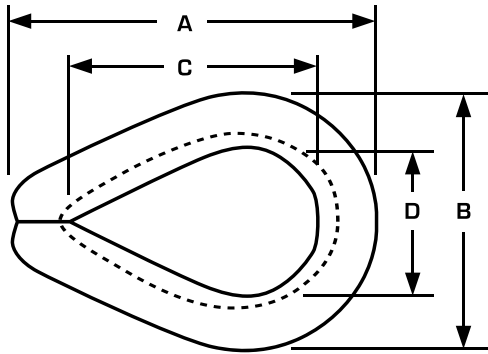

Hot Dip Galvanized

Size (in)	Weight Per 100 Pcs (lbs)	Dimensions (in.)					
		A	B	C	D	E	F
3/16	2.19	1.81	1.22	1.26	0.75	0.31	0.06
1/4	11.80	2.17	1.50	1.61	0.91	0.42	0.06
5/16	21.60	2.51	1.78	1.93	1.06	0.53	0.08
3/8	34.70	2.80	2.00	1.97	1.20	0.67	0.11
7/16	51.00	2.80	2.28	2.36	1.26	0.67	0.11
1/2	51.00	3.54	2.60	2.63	1.46	0.89	0.15
9/16	75.70	3.54	2.60	2.63	1.46	0.94	0.15
5/8	158.10	4.25	3.00	3.14	1.73	0.99	0.15
3/4	177.80	4.72	3.54	3.54	1.97	1.30	0.23
7/8	313.90	5.51	3.93	4.21	2.17	1.50	0.23
1	400.00	6.10	4.72	4.52	2.64	1.65	0.23
1-1/8-1-1/4	811.00	7.24	5.71	5.51	3.00	1.89	0.23
1-1/4-1-3/8	1294.80	9.00	6.89	6.30	3.50	2.28	0.38
1-3/8-1-1/2	1700.00	8.90	7.00	6.30	3.50	2.52	0.46
1 5/8	1775.00	10.60	7.49	7.80	3.93	2.68	0.46
1 3/4	2775.00	12.20	8.27	9.44	4.50	2.88	0.46
2	5.95	15.00	9.84	11.61	5.90	3.19	0.46

Regular Duty Thimbles

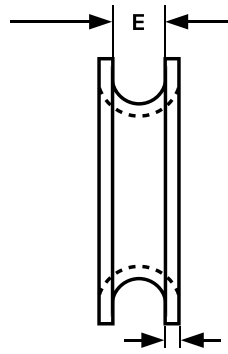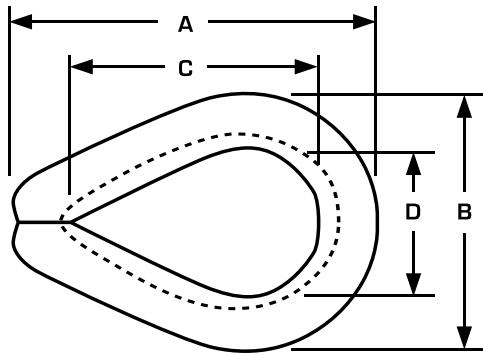


STANDARD Thimbles, Galvanized

Size (in)	Weight Per 100 Pcs (lbs)	Dimensions (in.)					
		A	B	C	D	E	F
1/8	3.50	1.90	1.10	1.37	0.71	0.28	0.05
3/16	3.50	1.90	1.10	1.37	0.71	0.33	0.05
1/4	3.50	1.90	1.10	1.37	0.71	0.37	0.05
5/16	4.00	2.10	1.20	1.60	0.81	0.43	0.05
3/8	6.70	2.32	1.45	1.70	0.94	0.55	0.06
1/2	12.50	2.71	1.73	1.93	1.14	0.69	0.08
5/8	34.50	3.39	2.36	2.24	1.45	0.92	0.11
3/4	47.10	3.70	2.48	2.48	1.57	1.10	0.15
7/8	84.60	4.89	3.42	3.54	2.20	1.32	0.15
1	97.50	5.60	3.93	4.01	2.51	1.46	0.15
1-1/8-1-1/4	175.00	6.18	4.52	4.25	2.76	1.81	0.23




Hook & Eye Turnbuckles

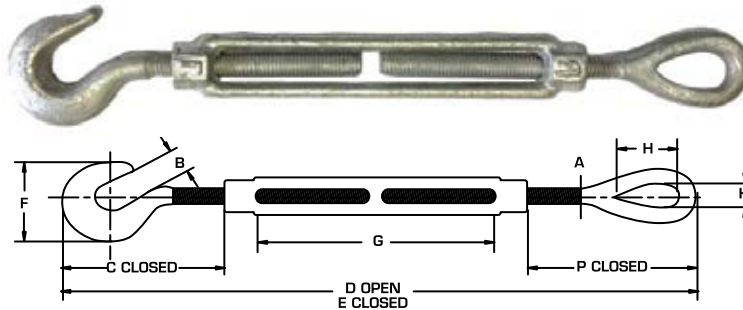

Thread Dia & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)									
			A	B	C Closed	D Closed	E Closed	F	G	H	K	P Closed
1/4 x 4	400	0.30	0.25	0.45	1.59	11.94	7.94	1.27	4.00	0.78	0.34	1.75
5/16 x 4 1/2	700	0.47	0.31	0.50	1.94	13.81	9.31	1.50	4.50	0.94	0.44	2.09
3/8 x 6	1000	0.75	0.38	0.56	2.30	17.72	11.72	1.77	6.00	1.12	0.53	2.52
1/2 x 6	1500	1.60	0.50	0.66	2.94	19.38	13.38	2.28	6.00	1.44	0.72	3.23
1/2 x 9	1500	1.83	0.50	0.66	2.94	25.38	16.38	2.28	9.00	1.44	0.72	3.23
1/2 x 12	1500	2.08	0.50	0.66	2.94	31.38	19.38	2.28	12.00	1.44	0.72	3.23
5/8 x 6	2250	2.75	0.63	0.84	3.69	21.25	15.25	2.81	6.00	1.75	0.88	3.90
5/8 x 9	2250	3.13	0.63	0.84	3.69	27.25	18.25	2.81	9.00	1.75	0.88	3.90
5/8 x 12	2250	3.50	0.63	0.84	3.69	33.25	21.25	2.81	12.00	1.75	0.88	3.90
3/4 x 6	3000	3.89	0.75	0.98	4.52	23.28	17.28	3.33	6.00	2.09	1.00	4.69
3/4 x 9	3000	4.61	0.75	0.98	4.52	29.28	20.28	3.33	9.00	2.09	1.00	4.69
3/4 x 12	3000	5.43	0.75	0.98	4.52	35.28	23.28	3.33	12.00	2.09	1.00	4.69
3/4 x 18	3000	7.25	0.75	0.98	4.52	47.28	29.28	3.33	18.00	2.09	1.00	4.69
7/8 x 12	4000	8.10	0.88	1.13	5.19	37.00	25.00	3.78	12.00	2.38	1.25	5.10
7/8 x 18	4000	9.95	0.88	1.13	5.19	49.00	31.00	3.78	18.00	2.38	1.25	5.10
1 x 6	5000	9.33	1.00	1.25	5.84	26.69	20.69	4.25	6.00	3.00	1.44	6.36
1 x 12	5000	11.93	1.00	1.25	5.84	38.69	26.69	4.25	12.00	3.00	1.44	6.36
1 x 18	5000	14.00	1.00	1.25	5.84	50.69	23.69	4.25	18.00	3.00	1.44	6.36
1 x 24	5000	17.25	1.00	1.25	5.84	62.69	38.69	4.25	24.00	3.00	1.44	6.36
1 1/4 x 12	6500	19.00	1.25	1.50	7.22	41.56	29.56	5.13	12.00	3.56	1.81	7.72
1 1/4 x 18	6500	23.00	1.25	1.50	7.22	53.56	35.56	5.13	18.00	3.56	1.81	7.72
1 1/4 x 24	6500	27.00	1.25	1.50	7.22	65.56	41.56	5.13	24.00	3.56	1.81	7.72
1 1/2 x 12	7500	27.50	1.50	1.88	8.34	44.44	32.44	5.75	12.00	4.06	2.12	8.62
1 1/2 x 18	7500	31.00	1.50	1.88	8.34	56.44	38.44	5.75	18.00	4.06	2.12	8.62
1 1/2 x 24	7500	37.50	1.50	1.88	8.34	68.44	44.44	5.75	24.00	4.06	2.12	8.62

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

Jaw & Eye Turnbuckles

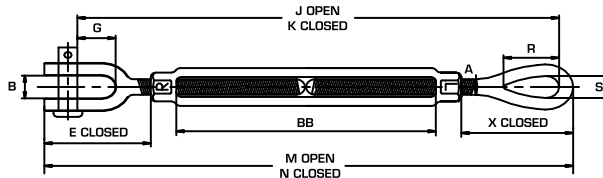


Thread Dia & Take Up (in)	WLL (lbs)	Weight Each (lbs)	Dimensions (in)											
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
1/4x4	500	0.32	0.25	0.45	1.58	0.62	11.35	7.35	12.07	8.07	0.78	0.34	1.75	4.00
5/16x4-1/2	800	0.47	0.31	0.50	1.98	0.87	13.71	8.71	14.01	9.51	0.94	0.44	2.09	4.50
3/8x6	1200	0.76	0.38	0.54	2.12	0.87	16.81	10.81	17.77	11.77	1.12	0.53	2.52	6.00
1/2x6	2200	1.53	0.50	0.68	2.75	1.06	18.29	12.29	19.48	13.48	1.44	0.72	3.23	6.00
1/2x9	2200	1.71	0.50	0.68	2.75	1.06	24.29	15.29	25.48	16.48	1.44	0.72	3.23	9.00
1/2x12	2200	2.06	0.50	0.68	2.75	1.06	30.29	18.29	31.48	19.48	1.44	0.72	3.23	12.00
5/8x6	3500	2.35	0.63	0.82	3.50	1.31	19.74	13.74	21.28	15.28	1.75	0.88	3.90	6.00
5/8x9	3500	3.06	0.63	0.82	3.50	1.31	25.74	16.74	27.28	18.28	1.75	0.88	3.90	9.00
5/8x12	3500	3.78	0.63	0.82	3.50	1.31	31.74	19.74	33.28	21.28	1.75	0.88	3.90	12.00
3/4x6	5200	4.00	0.75	1.03	4.18	1.50	21.19	15.19	23.11	17.11	2.09	1.00	4.69	6.00
3/4x9	5200	4.75	0.75	1.03	4.18	1.50	27.19	18.19	29.11	20.11	2.09	1.00	4.69	9.00
3/4x12	5200	5.36	0.75	1.03	4.18	1.50	33.19	21.19	35.11	23.11	2.09	1.00	4.69	12.00
3/4x18	5200	7.00	0.75	1.03	4.18	1.50	45.19	27.19	47.11	29.11	2.09	1.00	4.69	18.00
7/8x12	7200	8.00	0.88	1.23	4.85	1.75	34.34	22.34	36.57	24.57	2.38	1.25	5.10	12.00
7/8x18	7200	9.75	0.88	1.23	4.85	1.75	46.34	28.34	48.57	30.57	2.38	1.25	5.10	18.00
1x6	10000	8.92	1.00	1.31	5.53	2.06	24.34	18.34	26.89	20.89	3.00	1.44	6.36	6.00
1x12	10000	11.20	1.00	1.31	5.53	2.06	36.34	24.34	38.89	26.89	3.00	1.44	6.36	12.00
1x18	10000	13.30	1.00	1.31	5.53	2.06	48.34	30.34	50.89	32.89	3.00	1.44	6.36	18.00
1x24	10000	17.00	1.00	1.31	5.53	2.06	60.34	36.34	62.89	38.89	3.00	1.44	6.36	24.00
1-1/4x12	15200	20.00	1.25	1.86	7.21	2.81	38.82	26.82	42.05	30.05	3.56	1.81	7.72	12.00
1-1/4x18	15200	24.18	1.25	1.86	7.21	2.81	50.82	32.82	54.05	36.05	3.56	1.81	7.72	18.00
1-1/4x24	15200	28.50	1.25	1.86	7.21	2.81	62.82	38.82	66.05	42.05	3.56	1.81	7.72	24.00
1-1/2x12	21400	28.99	1.50	2.25	7.88	2.81	40.50	28.50	44.25	32.25	4.06	2.12	8.62	12.00
1-1/2x18	21400	35.00	1.50	2.25	7.88	2.81	52.50	34.50	56.25	38.25	4.06	2.12	8.62	18.00
1-1/2x24	21400	39.18	1.50	2.25	7.88	2.81	64.50	40.50	68.25	44.25	4.06	2.12	8.62	24.00
1-3/4x18	28000	53.75	1.75	2.60	9.40	3.38	55.38	37.38	59.78	41.78	4.62	2.38	10.00	18.00
1-3/4x24	28000	60.68	1.75	2.60	9.40	3.38	67.38	43.38	71.78	47.78	4.62	2.38	10.00	24.00
2x24	37000	89.00	2.00	2.62	11.86	3.69	72.62	48.62	77.95	53.95	5.75	2.69	13.09	24.00

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized




Hook & Hook Turnbuckles

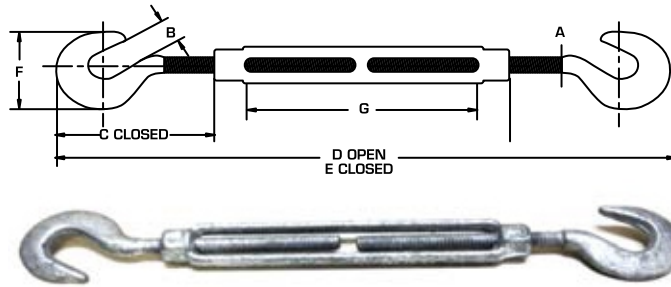

Thread Dia & Take Up (in)	WLL (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B	C Closed	D Open	E Closed	F	G
1/4 x 4	400	0.3	0.25	0.45	1.59	11.94	7.94	1.27	4
5/16 x 4 1/2	700	0.47	0.31	0.5	1.94	13.81	9.31	1.5	4.5
3/8 x 6	1000	0.75	0.38	0.56	2.3	17.72	11.72	1.77	6
1/2 x 6	1500	1.6	0.5	0.66	2.94	19.38	13.38	2.28	6
1/2 x 9	1500	1.83	0.5	0.66	2.94	25.38	16.38	2.28	9
1/2 x 12	1500	2.08	0.5	0.66	2.94	31.38	19.38	2.28	12
5/8 x 6	2250	2.75	0.63	0.84	3.69	21.25	15.25	2.81	6
5/8 x 9	2250	3.13	0.63	0.84	3.69	27.25	18.25	2.81	9
5/8 x 12	2250	3.5	0.63	0.84	3.69	33.25	21.25	2.81	12
3/4 x 6	3000	3.89	0.75	0.98	4.52	23.28	17.28	3.33	6
3/4 x 9	3000	4.61	0.75	0.98	4.52	29.28	20.28	3.33	9
3/4 x 12	3000	5.43	0.75	0.98	4.52	35.28	23.28	3.33	12
3/4 x 18	3000	7.25	0.75	0.98	4.52	47.28	29.28	3.33	18
7/8 x 12	4000	8.1	0.88	1.13	5.19	37	25	3.78	12
7/8 x 18	4000	9.95	0.88	1.13	5.19	49	31	3.78	18
1 x 6	5000	9.33	1	1.25	5.84	26.69	20.69	4.25	6
1 x 12	5000	11.93	1	1.25	5.84	38.69	26.69	4.25	12
1 x 18	5000	14	1	1.25	5.84	50.69	23.69	4.25	18
1 x 24	5000	17.25	1	1.25	5.84	62.69	38.69	4.25	24
1 1/4 x 12	6500	19	1.25	1.5	7.22	41.56	29.56	5.13	12
1 1/4 x 18	6500	23	1.25	1.5	7.22	53.56	35.56	5.13	18
1 1/4 x 24	6500	27	1.25	1.5	7.22	65.56	41.56	5.13	24
1 1/2 x 12	7500	27.5	1.5	1.88	8.34	44.44	32.44	5.75	12
1 1/2 x 18	7500	31	1.5	1.88	8.34	56.44	38.44	5.75	18
1 1/2 x 24	7500	37.5	1.5	1.88	8.34	68.44	44.44	5.75	24

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

Eye & Eye Turnbuckles

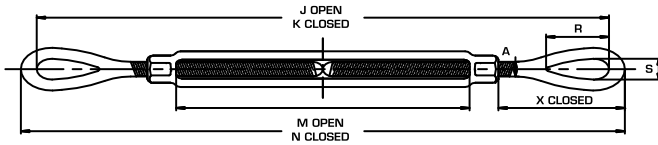


Thread Dia & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)								
			A	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
1/4x4	500	0.30	0.25	11.80	7.80	12.25	8.25	0.78	0.34	1.75	4.00
5/16x4-1/2	800	0.47	0.31	13.56	9.06	14.12	9.62	0.94	0.44	2.09	4.50
3/8x6	1200	0.75	0.38	17.47	11.47	18.16	12.16	1.12	0.53	2.52	6.00
1/2x6	2200	1.60	0.50	19.08	13.08	19.96	13.96	1.44	0.72	3.23	6.00
1/2x9	2200	1.83	0.50	25.08	16.08	25.96	16.96	1.44	0.72	3.23	9.00
1/2x12	2200	2.08	0.50	31.08	19.08	31.96	19.96	1.44	0.72	3.23	12.00
5/8x6	3500	2.75	0.63	20.68	14.68	21.68	15.68	1.75	0.88	3.90	6.00
5/8x9	3500	3.13	0.63	26.68	17.68	27.68	18.68	1.75	0.88	3.90	9.00
5/8x12	3500	3.50	0.63	32.68	20.68	33.68	21.68	1.75	0.88	3.90	12.00
3/4x6	5200	3.89	0.75	22.38	16.38	23.62	17.62	2.09	1.00	4.69	6.00
3/4x9	5200	4.61	0.75	28.38	19.38	29.62	20.62	2.09	1.00	4.69	9.00
3/4x12	5200	5.43	0.75	34.38	22.38	35.62	23.62	2.09	1.00	4.69	12.00
3/4x18	5200	7.25	0.75	46.38	28.38	47.62	29.62	2.09	1.00	4.69	18.00
7/8x12	7200	8.10	0.88	35.32	23.32	36.82	24.82	2.38	1.25	5.10	12.00
7/8x18	7200	9.95	0.88	47.32	29.32	48.82	30.82	2.38	1.25	5.10	18.00
1x6	10000	9.33	1.00	25.97	19.97	27.72	21.72	3.00	1.44	6.36	6.00
1x12	10000	11.93	1.00	37.97	25.97	39.97	27.72	3.00	1.44	6.36	12.00
1x18	10000	14.00	1.00	49.97	31.97	51.72	33.72	3.00	1.44	6.36	18.00
1x24	10000	17.25	1.00	61.97	37.97	63.72	39.72	3.00	1.44	6.36	24.00
1-1/4x12	15200	19.00	1.25	40.31	28.31	42.56	30.56	3.56	1.81	7.72	12.00
1-1/4x18	15200	23.00	1.25	52.31	34.31	54.56	36.56	3.56	1.81	7.72	18.00
1-1/4x24	15200	27.00	1.25	64.31	40.31	66.56	42.56	3.56	1.81	7.72	24.00
1-1/2x12	21400	27.50	1.50	42.50	30.50	45.00	33.00	4.06	2.12	8.62	12.00
1-1/2x18	21400	31.00	1.50	54.50	36.50	57.00	39.00	4.06	2.12	8.62	18.00
1-1/2x24	21400	37.50	1.50	66.50	42.50	69.00	45.00	4.06	2.12	8.62	24.00
1-3/4x18	28000	52.50	1.75	57.38	39.38	60.38	42.38	4.62	2.38	10.00	18.00
1-3/4x24	28000	58.00	1.75	69.38	45.38	72.38	48.38	4.62	2.38	10.00	24.00
2x24	37000	85.25	2.00	75.69	51.69	79.19	55.19	5.57	2.69	13.09	24.00

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized




Jaw & Jaw Turnbuckles

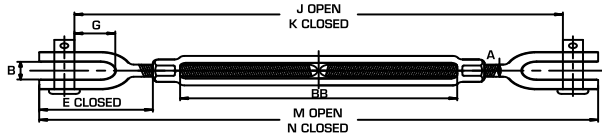

Thread Dia & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)								
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	BB
1/4x4	500	0.36	0.25	0.45	1.58	0.62	10.90	6.90	11.90	7.90	4.00
5/16x4-1/2	800	0.52	0.31	0.50	1.98	0.87	12.36	8.36	13.90	9.40	4.50
3/8x6	1200	0.81	0.38	0.54	2.12	0.87	16.14	10.14	17.38	11.38	6.00
1/2x6	2200	1.50	0.50	0.68	2.75	1.06	17.50	11.50	19.00	13.00	6.00
1/2X9	2200	1.74	0.50	0.68	2.75	1.06	23.50	14.50	25.00	16.00	9.00
1/2x12	2200	2.40	0.50	0.68	2.75	1.06	29.50	17.50	31.00	19.00	12.00
5/8x6	3500	2.72	0.63	0.82	3.50	1.31	18.80	12.80	20.88	14.88	6.00
5/8X9	3500	3.24	0.63	0.82	3.50	1.31	24.80	15.80	26.88	17.88	9.00
5/8x12	3500	3.74	0.63	0.82	3.50	1.31	30.80	18.80	32.88	20.88	12.00
3/4x6	5200	4.11	0.75	1.03	4.18	1.50	20.00	14.00	22.60	16.60	6.00
3/4X9	5200	5.10	0.75	1.03	4.18	1.50	26.00	17.00	28.60	19.60	9.00
3/4x12	5200	5.65	0.75	1.03	4.18	1.50	32.00	20.00	34.60	22.60	12.00
3/4x18	5200	7.00	0.75	1.03	4.18	1.50	44.00	26.00	46.60	28.60	18.00
7/8x12	7200	8.17	0.88	1.23	4.85	1.75	33.36	21.36	36.32	24.32	12.00
7/8X18	7200	9.96	0.88	1.23	4.85	1.75	45.36	27.36	48.32	30.32	18.00
1X6	10000	8.50	1.00	1.31	5.53	2.06	22.72	16.72	26.06	20.06	6.00
1x12	10000	12.00	1.00	1.31	5.53	2.06	34.72	22.72	38.06	26.06	12.00
1X18	10000	14.00	1.00	1.31	5.53	2.06	46.72	28.72	50.06	32.06	18.00
1X24	10000	17.00	1.00	1.31	5.53	2.06	58.72	34.72	62.06	38.06	24.00
1-1/4X12	15200	21.50	1.25	1.86	7.21	2.81	37.34	25.34	41.54	29.54	12.00
1-1/4x18	15200	24.25	1.25	1.86	7.21	2.81	49.34	31.34	53.54	35.54	18.00
1-1/4x24	15200	28.00	1.25	1.86	7.21	2.81	61.34	37.34	65.54	41.54	24.00
1-1/2x12	21400	30.50	1.50	2.25	7.88	2.81	38.50	26.50	43.50	31.50	12.00
1-1/2x18	21400	36.75	1.50	2.25	7.88	2.81	50.50	32.50	55.50	37.50	18.00
1-1/2x24	21400	40.67	1.50	2.25	7.88	2.81	62.50	38.50	67.50	43.50	24.00
1-3/4x18	28000	55.04	1.75	2.60	9.40	3.38	53.38	35.38	59.18	41.18	18.00
1- 3/4x24	28000	63.36	1.75	2.60	9.40	3.38	65.38	41.38	71.18	47.18	24.00
2x24	37000	94.25	2.00	2.62	11.86	3.69	69.54	45.54	76.72	52.72	24.00

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

Stub End Turnbuckles

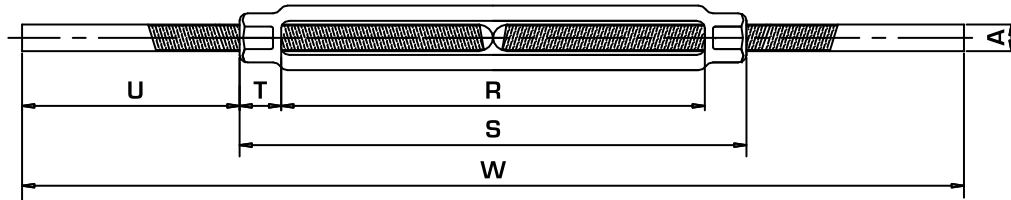


Drop Forged • Self Colored

Thread Dia & Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)					
			A	R	S	T	U	W
3/8 x 6	1200	0.75	0.38	6.00	7.13	.56	4.44	16.00
1/2 x 6	2200	1.25	0.50	6.00	7.50	.75	4.25	16.00
5/8 x 6	3500	2.00	0.63	6.00	7.88	.94	4.06	16.00
3/4 x 6	5200	3.27	0.75	6.00	8.25	1.13	4.38	17.00
7/8 x 6	7200	4.78	0.88	6.00	8.63	1.31	4.69	18.00
1 x 6	10000	6.33	1.00	6.00	9.00	1.50	5.00	19.00
1 x 12	10000	9.50	1.00	12.00	15.00	1.50	5.00	25.00
1 1/8 x 6	12400	8.88	1.13	6.00	9.13	1.56	4.94	19.00
1 1/4 x 6	15200	10.18	1.25	6.00	9.13	1.56	5.44	20.00
1 1/4 x 12	15200	14.00	1.25	12.00	15.12	1.56	5.44	26.00
1 1/2 x 12	21400	22.00	1.50	12.00	15.75	1.88	5.38	26.50




Turnbuckles - Body Only

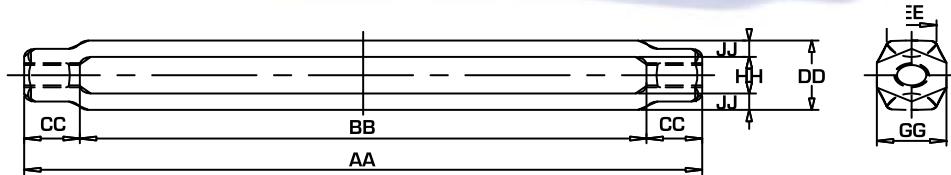

Shank Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)							
			AA	BB	CC	DD	EE	GG	HH	JJ
1/4x4	500	0.15	4.87	4.07	0.40	0.72	0.34	0.50	0.38	0.17
5/16x4-1/2	800	0.22	5.59	4.58	0.51	0.82	0.38	0.56	0.44	0.19
3/8x6	1200	0.29	7.29	6.10	0.60	0.88	0.38	0.63	0.50	0.19
1/2x6	2200	0.70	7.70	6.03	0.84	1.19	0.68	0.81	0.63	0.28
1/2x9	2200	1.03	11.03	9.36	0.84	1.19	0.68	0.81	0.63	0.28
1/2x12	2200	1.27	14.03	12.36	0.84	1.19	0.68	0.81	0.63	0.28
5/8x6	3500	1.11	8.02	6.03	1.00	1.43	0.83	1.00	0.75	0.34
5/8x9	3500	1.59	11.38	9.36	1.00	1.43	0.83	1.00	0.75	0.34
5/8x12	3500	1.96	14.38	12.39	1.00	1.43	0.83	1.00	0.75	0.34
3/4x6	5200	1.50	8.26	6.13	1.07	1.74	0.94	1.13	0.94	0.40
3/4x9	5200	2.17	11.72	9.59	1.07	1.74	0.94	1.13	0.94	0.40
3/4x12	5200	2.66	14.72	12.59	1.07	1.74	0.94	1.13	0.94	0.40
3/4x18	5200	3.63	20.66	18.56	1.07	1.74	0.94	1.13	0.94	0.40
7/8x12	7200	3.61	14.62	12.16	1.23	2.00	1.13	1.31	1.06	0.47
7/8x18	7200	5.27	21.09	18.63	1.23	2.00	1.13	1.31	1.06	0.47
1x6	10000	3.32	9.00	6.18	1.41	2.45	1.25	1.50	1.25	0.60
1x12	10000	5.34	15.00	12.18	1.41	2.45	1.25	1.50	1.25	0.60
1x18	10000	7.35	21.00	18.18	1.41	2.45	1.25	1.50	1.25	0.60
1x24	10000	9.85	27.66	24.84	1.41	2.45	1.25	1.50	1.25	0.60
1-1/4x12	15200	5.75	15.40	12.06	1.67	2.62	1.25	1.88	1.50	0.56
1-1/4x18	15200	7.58	21.40	18.06	1.67	2.62	1.25	1.88	1.50	0.56
1-1/4x24	15200	9.45	27.96	24.62	1.67	2.62	1.25	1.88	1.50	0.56
1-1/2x12	21400	8.01	15.82	12.32	1.75	2.99	1.50	2.25	1.75	0.62

Regular Nut Eye Bolts

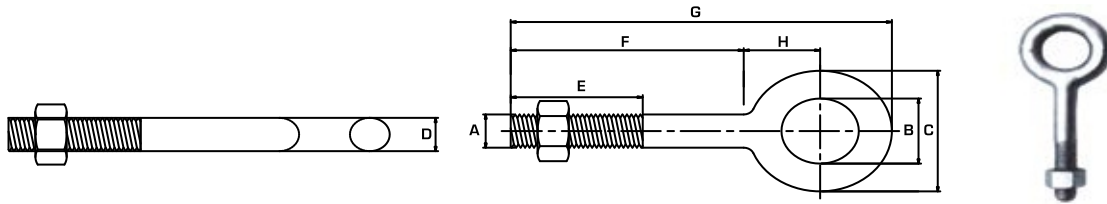


Shank Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)							
			A	B	C	D	E	F	G	H
1/4x2	500	6.00	0.25	0.50	1.00	0.25	1.50	2.00	3.06	0.56
1/4x4	500	13.50	0.25	0.50	1.00	0.25	2.50	4.00	5.06	0.56
5/16x2 1/4	800	18.75	0.31	0.62	1.25	0.31	1.50	2.25	3.56	0.69
5/16x4 1/4	800	25.00	0.31	0.62	1.25	0.31	2.50	4.25	5.56	0.69
3/8x2 1/2	1200	24.33	0.38	0.75	1.50	0.38	1.50	2.50	4.12	0.88
3/8x4 1/2	1200	37.50	0.38	0.75	1.50	0.38	2.50	4.50	6.12	0.88
3/8x6	1200	43.75	0.38	0.75	1.50	0.38	2.50	6.00	7.62	0.88
1/2x3 1/4	2200	50.00	0.50	1.00	2.00	0.50	1.50	3.25	5.38	1.12
1/2x6	2200	62.50	0.50	1.00	2.00	0.50	3.00	6.00	8.12	1.12
1/2x8	2200	75.00	0.50	1.00	2.00	0.50	3.00	8.00	10.12	1.12
1/2x10	2200	88.00	0.50	1.00	2.00	0.50	3.00	10.00	12.12	1.12
1/2x12	2200	100.00	0.50	1.00	2.00	0.50	3.00	12.00	14.12	1.12
5/8x4	3500	101.25	0.62	1.25	2.50	0.62	2.00	4.00	6.69	1.44
5/8x6	3500	120.00	0.62	1.25	2.50	0.62	3.00	6.00	8.69	1.44
5/8x8	3500	131.00	0.62	1.25	2.50	0.62	3.00	8.00	10.69	1.44
5/8x10	3500	162.50	0.62	1.25	2.50	0.62	3.00	10.00	12.69	1.44
5/8x12	3500	175.00	0.62	1.25	2.50	0.62	4.00	12.00	14.69	1.44
3/4x4 1/2	5200	185.90	0.75	1.50	3.00	0.75	2.00	4.50	7.69	1.69
3/4x6	5200	180.00	0.75	1.50	3.00	0.75	3.00	6.00	9.19	1.69
3/4x8	5200	200.00	0.75	1.50	3.00	0.75	3.00	8.00	11.19	1.69
3/4x10	5200	237.50	0.75	1.50	3.00	0.75	3.00	10.00	13.19	1.69
3/4x12	5200	251.94	0.75	1.50	3.00	0.75	4.00	12.00	15.19	1.69
3/4x15	5200	300.00	0.75	1.50	3.00	0.75	5.00	15.00	18.19	1.69
7/8x5	7200	275.00	0.88	1.75	3.50	0.88	2.50	5.00	8.75	2.00
7/8x8	7200	325.00	0.88	1.75	3.50	0.88	4.00	8.00	11.75	2.00
7/8x12	7200	400.00	0.88	1.75	3.50	0.88	4.00	12.00	15.75	2.00
1x6	10000	425.00	1.00	2.00	4.00	1.00	3.00	6.00	10.31	2.31
1x9	10000	452.00	1.00	2.00	4.00	1.00	4.00	9.00	13.31	2.31
1x12	10000	550.00	1.00	2.00	4.00	1.00	4.00	12.00	16.31	2.31
1x18	10000	650.00	1.00	2.00	4.00	1.00	7.00	18.00	22.31	2.31
1 1/4x8	15200	750.00	1.25	2.50	5.00	1.25	4.00	8.00	13.38	2.88
1 1/4x12	15200	900.00	1.25	2.50	5.00	1.25	4.00	12.00	17.38	2.88
1 1/4x20	15200	1150.00	1.25	2.50	5.00	1.25	6.00	20.00	25.38	2.88

Hot dip galvanized • Forged steel, quenched and tempered

www.dominionriggingproducts.com




Eye Nuts

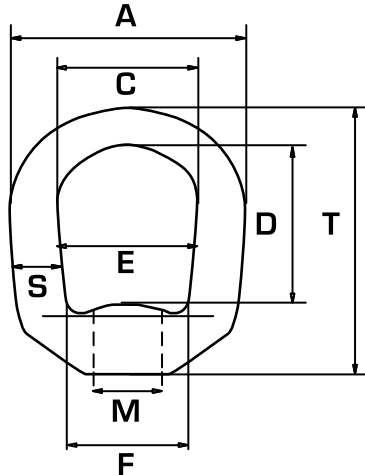

Size No.	Std. Tap. M	Dimensions (in)							Max. Tap. Size Possible	WLL (lbs)	Weight (lbs)
		A	C	D	E	F	S	T			
1	1/4	1 - 1/4	3/4	1 - 1/16	21/32	1/2	1/4	1 - 11/16	3/8	520	0.09
1A	5/16	1 - 1/4	3/4	1 - 1/16	21/32	1/2	1/4	1 - 11/16	3/8	850	0.09
2	3/8	1 - 5/8	1	1 - 1/4	3/4	9/16	5/16	2 - 1/16	7/16	1,250	0.18
3	7/16	2	1 - 1/4	1 - 1/2	1	13/16	3/8	2 - 1/2	1/2	1,700	0.29
3A	1/2	2	1 - 1/4	1 - 1/2	1	13/16	3/8	2 - 1/2	—	2,250	0.29
4	5/8	2 - 1/2	1 - 1/2	2	1 - 3/16	1	1/2	3 - 3/16	3/4	3,600	0.58
5	3/4	3	1 - 3/4	2 - 3/8	1 - 3/8	1 - 1/8	5/8	3 - 7/8	7/8	5,200	1.00
5	7/8	3 - 1/2	2	2 - 5/8	1 - 5/8	1 - 5/16	3/4	4 - 5/16	1	7,200	1.70
7	1	4	2 - 1/4	3 - 1/16	1 - 7/8	1 - 9/16	7/8	5	1 - 1/4	10,000	2.75
7A	1 - 1/8	4	2 - 1/4	3 - 1/16	1 - 7/8	1 - 9/16	7/8	5	1 - 1/4	12,300	2.75
8	1 - 1/4	4 - 1/2	2 - 1/2	3 - 1/2	1 - 15/16	1 - 7/8	1	5 - 3/4	1 - 1/2	15,500	3.85
9	1 - 3/8	5	2 - 3/4	2 - 3/4	2	2	1 - 1/8	6 - 1/4	1 - 1/2	18,500	5.00
10	1 - 1/2	5 - 5/8	3 - 1/8	4	2 - 3/8	2 - 1/4	1 - 1/4	6 - 3/4	1 - 3/4	22,500	6.70
11	2	7	4	6 - 1/4	4	3 - 3/8	1 - 1/2	10	2 - 3/4	40,000	18.70

Carbon Steel Hot


Shoulder Nut Eye Bolts

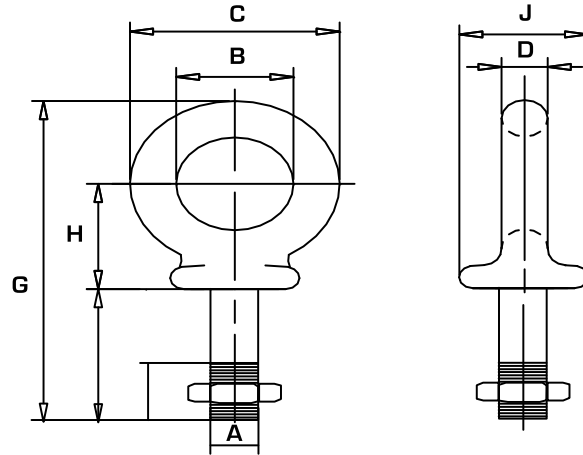

Shank Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Per 100 (lbs)	Dimensions (in)								
			A	B	C	D	E	F	G	H	J
1/4X2	500	6.61	0.25	0.50	0.88	0.19	1.50	2.00	2.94	0.50	0.47
1/4X4	500	8.61	0.25	0.50	0.88	0.19	2.50	4.00	4.94	0.50	0.47
5/16X2 1/4	800	12.50	0.31	0.62	1.12	0.25	1.50	2.25	3.50	0.69	0.56
5/16X4 1/4	800	18.75	0.31	0.62	1.12	0.25	2.50	4.25	5.50	0.69	0.56
3/8X2 1/2	1200	19.00	0.38	0.75	1.38	0.31	1.50	2.50	3.97	0.78	0.66
3/8X4 1/2	1200	31.58	0.38	0.75	1.38	0.31	2.50	4.50	5.97	0.78	0.66
1/2X3 1/4	2200	37.50	0.50	1.00	1.75	0.38	1.50	3.25	5.12	1.00	0.91
1/2X6	2200	56.25	0.50	1.00	1.75	0.38	3.00	6.00	7.88	1.00	0.91
5/8X4	3500	75.00	0.62	1.25	2.25	0.50	2.00	4.00	6.44	1.31	1.12
5/8X6	3500	100.25	0.62	1.25	2.25	0.50	3.00	6.00	8.44	1.31	1.12
3/4X4 1/2	5200	125.00	0.75	1.50	2.75	0.62	2.00	4.50	7.44	1.56	1.38
3/4X6	5200	150.00	0.75	1.50	2.75	0.62	3.00	6.00	8.94	1.56	1.38
7/8X5	7200	225.00	0.88	1.75	3.25	0.75	2.50	5.00	8.47	1.84	1.56
1X6	10000	375.00	1.00	2.00	3.75	0.88	3.00	6.00	9.97	2.09	1.81
1X9	10000	429.00	1.00	2.00	3.75	0.88	4.00	9.00	12.97	2.09	1.81
1 1/4X8	15200	650.00	1.25	2.50	4.50	1.00	4.00	8.00	12.72	2.47	2.28
1 1/4X12	15200	775.00	1.25	2.50	4.50	1.00	4.00	12.00	16.72	2.47	2.28
1 1/2X15	21400	1425.00	1.50	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75



Hot dip galvanized • Forged steel, quenched and tempered

Shoulder Type Machinery Eye Bolts

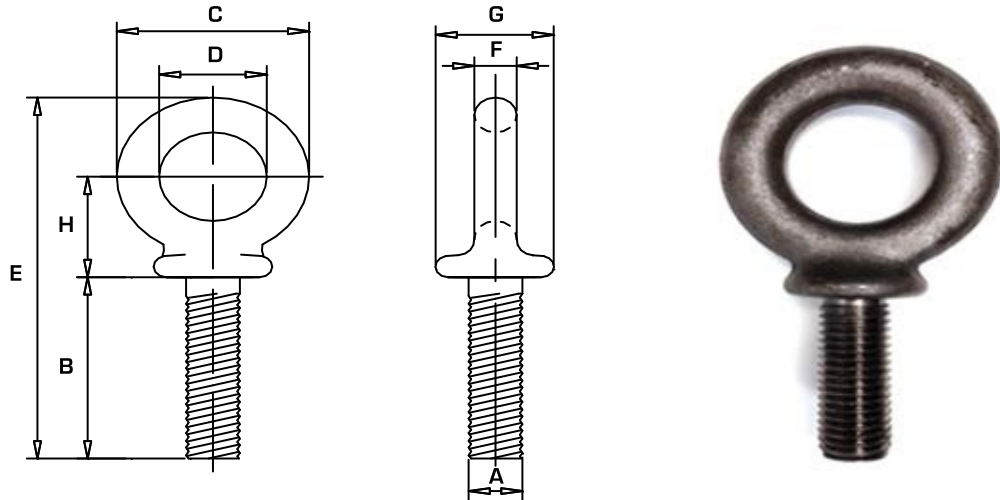

Shank Dia. & Thread (in)	Working Load Limit (lbs)	Weight Per 100 (lbs)	Dimensions (in)							
			A	B	C	D	E	F	G	H
1/4X1	500	3.20	0.25	1.00	0.88	0.50	1.94	0.19	0.47	0.50
5/16X1 1/8	800	6.20	0.31	1.13	1.12	0.62	2.38	0.25	0.56	0.69
3/8X1 1/4	1200	12.50	0.38	1.25	1.38	0.75	2.72	0.31	0.66	0.78
1/2X1 1/2	2200	25.00	0.50	1.50	1.75	1.00	3.38	0.38	0.91	1.00
5/8X1 3/4	3500	50.00	0.63	1.75	2.25	1.25	4.19	0.50	1.12	1.31
3/4X2	5200	87.50	0.75	2.00	2.75	1.50	4.94	0.62	1.38	1.56
7/8X2 1/4	7200	150.00	0.88	2.25	3.25	1.75	5.72	0.75	1.56	1.84
7/8X2 1/2	7200	150.00	0.88	2.50	3.25	1.75	5.72	0.75	1.56	1.84
1X2 1/2	10000	218.00	1.00	2.50	3.75	2.00	6.47	0.88	1.81	2.09
1 1/4X3	15200	380.00	1.25	3.00	4.50	2.50	7.72	1.00	2.28	2.47
1 1/2X3 1/2	21400	700.00	1.50	3.50	5.50	3.00	9.25	1.25	2.75	3.00


Screw Pin Anchor Shackles

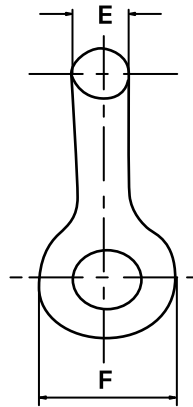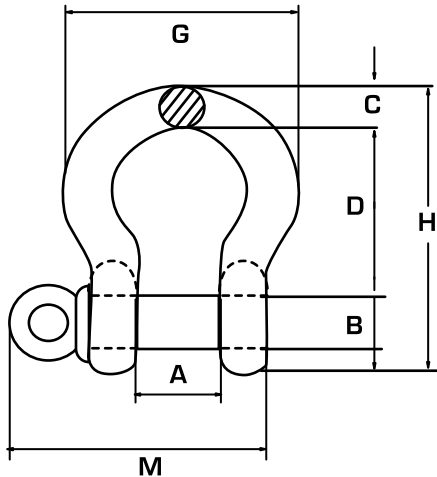

Nominal Shackle Size (in)	Weight (lbs) Screw Pin Type	Working Load Limit (tons)	Dimensions (in)								
			A	B	C	D	E	F	G	H	M
3/16	0.06	1/3	0.38	0.25	0.19	0.88	0.19	0.56	0.98	1.47	1.12
1/4	0.10	1/2	0.47	0.31	0.25	1.13	0.25	0.61	1.28	1.84	1.38
5/16	0.19	3/4	0.53	0.38	0.31	1.22	0.31	0.75	1.47	2.09	1.66
3/8	0.31	1	0.66	0.44	0.38	1.44	0.38	0.91	1.78	2.49	2.03
7/16	0.38	1 1/2	0.75	0.50	0.44	1.69	0.44	1.06	2.03	2.91	2.38
1/2	0.72	2	0.81	0.63	0.50	1.88	0.50	1.19	2.31	3.28	2.69
5/8	1.37	3 1/4	1.06	0.75	0.62	2.38	0.63	1.50	2.94	4.19	3.34
3/4	2.35	4 3/4	1.25	0.88	0.81	2.81	0.75	1.81	3.50	4.97	3.97
7/8	3.62	6 1/2	1.44	1.00	0.97	3.31	0.88	2.09	4.03	5.83	4.50
1	5.03	8 1/2	1.69	1.13	1.06	3.75	1.00	2.38	4.69	6.56	5.07
1 1/8	7.41	9 1/2	1.81	1.25	1.25	4.25	1.16	2.69	5.16	7.47	5.59
1 1/4	9.05	12	2.03	1.38	1.38	4.69	1.29	3.00	5.75	8.25	6.16
1 3/8	13.53	13 1/2	2.25	1.50	1.50	5.25	1.42	3.31	6.38	9.16	6.84
1 1/2	17.20	17	2.38	1.63	1.62	5.75	1.54	3.63	6.88	10.00	7.35
1 3/4	27.78	25	2.88	2.00	2.25	7.00	1.84	4.19	8.86	12.34	9.08
2	45.00	35	3.25	2.25	2.40	7.75	2.08	4.81	9.97	13.68	10.34
2 1/2	85.75	55	4.13	2.75	3.13	10.50	2.71	5.69	12.87	17.84	13.00

Hot dip galvanized forged steel.
Quenched and tempered, with alloy pin.



Bolt Type Anchor & Chain Shackles

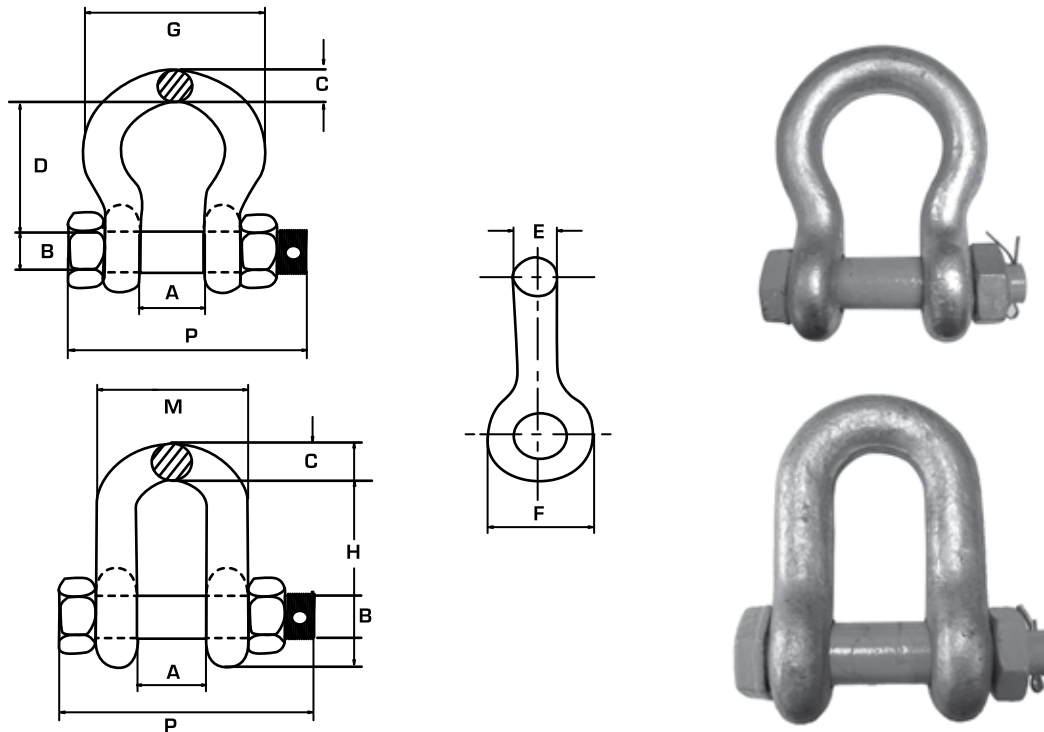

Nominal Shackle Size (in)	Weight (lbs) Bow Type	Weight (lbs) Chain Type	Working Load Limit (tons)	Dimensions (in.)									
				A	B	C	D	E	F	G	I	M	P
1/2	0.79	0.75	2	0.81	0.63	0.50	1.88	0.50	1.19	2.31	1.63	1.81	2.80
5/8	1.68	1.47	3 1/4	1.06	0.75	0.69	2.38	0.63	1.50	2.94	2.00	2.31	3.53
3/4	2.72	2.52	4 3/4	1.25	0.86	0.81	2.81	0.75	1.81	3.50	2.38	2.75	4.07
7/8	3.95	3.85	6 1/2	1.44	1.00	0.97	3.31	0.88	2.09	4.03	2.81	3.19	4.71
1	5.66	5.55	8 1/2	1.69	1.13	1.06	3.75	1.00	2.38	4.69	3.19	3.69	5.31
1 1/8	8.27	7.60	9 1/2	1.81	1.25	1.25	4.25	1.13	2.69	5.16	3.58	4.06	5.90
1 1/4	11.71	10.81	12	2.03	1.38	1.38	4.69	1.25	3.00	5.75	3.94	4.53	6.51
1 3/8	15.83	13.75	13 1/2	2.25	1.50	1.50	5.25	1.38	3.31	6.38	4.38	5.00	7.21
1 1/2	20.80	18.50	17	2.38	1.63	1.62	5.75	1.50	3.63	6.88	4.81	5.38	7.73
1 3/4	33.91	31.40	25	2.88	2.00	2.25	7.00	1.75	4.19	8.86	5.75	6.38	9.05
2	52.25	46.75	35	3.25	2.25	2.40	7.75	2.00	4.81	9.97	6.75	7.25	10.41
2 1/2	98.25	85.00	55	4.13	2.75	3.13	10.50	2.62	5.69	12.87	8.00	9.38	13.56
3	154.00	124.25	85	5.00	3.25	3.62	13.00	3.00	6.50	14.36	8.50	11.00	16.50

Hot dip galvanized forged steel.
Quenched and tempered, with alloy pin.


Screw Pin Chain Shackles

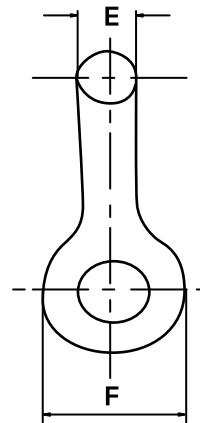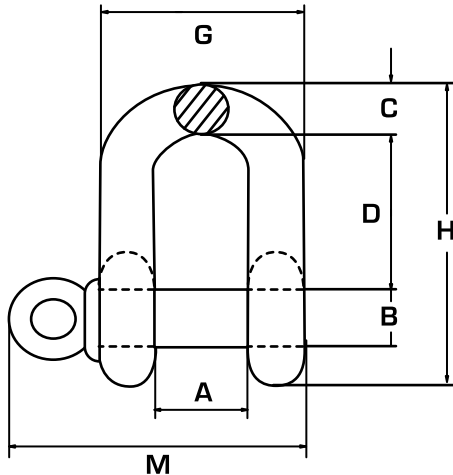

Nominal Size (in)	Working Load Limit (tons)	Dimensions (in.)									Weight (lbs) Screw Pin Type
		A	B	C	D	E	F	G	H	M	
1/4	1/2	0.47	0.31	0.25	0.88	0.25	0.61	0.97	1.59	1.38	0.11
5/16	3/4	0.53	0.38	0.31	1.03	0.31	0.75	1.16	1.91	1.66	0.17
3/8	1	0.66	0.44	0.38	1.25	0.38	0.91	1.41	2.30	2.03	0.28
7/16	1 1/2	0.75	0.50	0.44	1.44	0.44	1.06	1.63	2.66	2.38	0.43
1/2	2	0.81	0.63	0.50	1.63	0.50	1.19	1.81	3.03	2.69	0.59
5/8	3 1/4	1.06	0.75	0.62	2.00	0.63	1.50	2.31	3.75	3.34	1.25
3/4	4 3/4	1.25	0.88	0.81	2.38	0.75	1.81	2.75	4.53	3.97	2.63
7/8	6 1/2	1.44	1.00	0.97	2.81	0.88	2.09	3.19	5.33	4.50	3.16
1	8 1/2	1.69	1.13	1.00	3.19	1.00	2.38	3.69	5.94	5.07	4.75
1 1/8	9 1/2	1.81	1.25	1.25	3.58	1.13	2.69	4.06	6.78	5.59	6.75
1 1/4	12	2.03	1.38	1.38	3.94	1.25	3.00	4.53	7.50	6.16	9.06
1 3/8	13 1/2	2.25	1.50	1.50	4.38	1.38	3.31	5.00	8.28	6.84	11.63
1 1/2	17	2.38	1.63	1.62	4.81	1.50	3.62	5.38	9.06	7.35	15.95
1 3/4	25	2.88	2.00	2.12	5.75	1.75	4.19	6.38	10.97	9.08	26.75
2	35	3.25	2.25	2.00	6.75	2.00	4.81	7.25	12.28	10.34	42.31
2 1/2	55	4.13	2.75	2.62	8.00	2.62	5.69	9.38	14.84	13.00	71.75




Electro Galv Snap Hooks



Size (in.)	Working Load Limit (lbs)	Dimensions (in.)				Weight (kgs)
		B	E	R	T	
7/16	750	.75	.75	3.23	.79	0.12
9/16	1,000	1.12	.79	3.82	.87	0.23

Forged Carbon Steel. Quenched & Tempered.


Clevis Grab Hooks



Size of Chain (in.)	Working Load Limit (lbs)		Dimensions (in.)				Weight (lbs)
	Carbon	Alloy	A	B	C	D	
1/4	2600	3500	0.36	0.4	0.38	1.97	0.4
5/16	3900	4500	0.4	0.44	0.44	2.26	0.79
3/8	5400	7100	0.48	0.5	0.47	2.63	1
7/16	7200	10000	0.66	0.56	0.56	2.75	1.5
1/2	9200	12000	0.75	0.66	0.63	3.19	2.1
5/8	13000	15800	0.91	0.78	0.75	4.09	4.2
3/4	20200	24700	0.94	0.94	0.88	4.63	6.5

G43 forged carbon steel • G70 forged alloy steel • Quenched and tempered


Clevis Slip Hooks



Size of Chain (in)	Working Load Limit (lbs)		Dimensions (in.)				Weight (lbs)
	Carbon	Alloy	A	B	C	D	
1/4	1950	2750	0.44	0.94	0.38	2.56	0.50
5/16	2875	4300	0.50	1.06	0.44	2.87	0.75
3/8	4000	5250	0.59	1.31	0.47	3.25	1.20
7/16	5000	7000	0.66	1.56	0.56	3.70	2.06
1/2	6500	9000	0.75	1.69	0.63	4.00	2.80
5/8	9250	13500	0.91	2.00	0.75	4.94	4.75
3/4	12500	19250	1.31	2.50	1.00	6.09	10.30

G43 forged carbon steel • G70 forged alloy steel • Quenched and tempered

Latch Kits

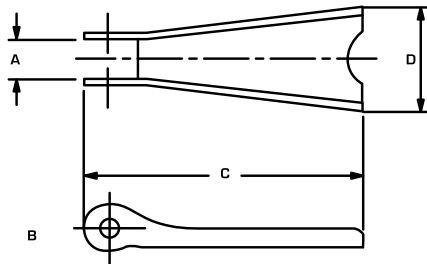


Hook size (tons)		Dimensions (in)				Weight (lbs)
Carbon	Alloy	R	O	T	E	
1/2	3/4	0.36	0.14	1.30	0.51	0.02
3/4	1	0.41	0.14	1.48	0.59	0.02
1	1 1/2	0.41	0.14	1.84	0.67	0.02
1 1/2	2	0.49	0.18	1.84	0.75	0.03
2	3	0.49	0.18	2.02	0.87	0.03
3	4 1/2	0.63	0.18	2.41	1.00	0.06
5	7	0.71	0.20	2.99	1.42	0.11
7 1/2	11	0.79	0.20	3.68	1.57	0.17

Stainless steel or galvanized carbon steel construction with spring, bolt and nut




Eye Grab Hooks

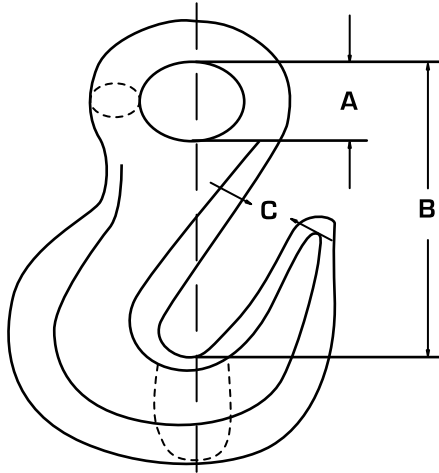

Size of Chain (in)	Working Load Limit (lbs)		Dimensions (in.)			Weight (lbs)
	Carbon	Alloy	A	B	C	
1/4	2600	3500	0.50	0.34	1.97	0.28
5/16	3900	4500	0.56	0.44	2.25	0.45
3/8	5400	7100	0.66	0.50	2.56	0.79
7/16	7200	10000	0.75	0.56	2.94	1.19
1/2	9200	12000	0.88	0.66	3.38	1.80
5/8	13000	15800	1.06	0.78	4.11	3.30
3/4	20200	24700	1.38	0.94	5.16	6.00

G43 forged carbon steel
G70 forged alloy steel
Quenched and tempered

Eye Slip Hooks with and w/out latch


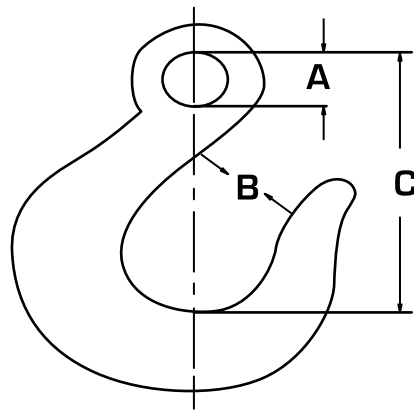


Size of Chain (in)	Working Load Limit (lbs)		Dimensions (in.)			Weight (lbs)	Weight w/ Latch (Lbs)
	Carbon	Alloy	A	B	C		
1/4	1950	2750	0.50	0.94	2.56	0.40	0.42
5/16	2875	4300	0.63	1.06	2.95	0.70	0.72
3/8	4000	5250	0.72	1.31	3.36	1.00	1.03
7/16	5000	7000	0.81	1.56	3.88	1.60	1.64
1/2	6500	9000	0.94	1.69	4.28	2.40	2.45
5/8	9250	13500	1.13	2.00	5.22	4.00	4.13
3/4	12500	19250	1.38	2.13	5.80	6.50	6.76

G43 forged carbon steel
G70 forged alloy steel
Quenched and tempered




Eye Hoist Hooks

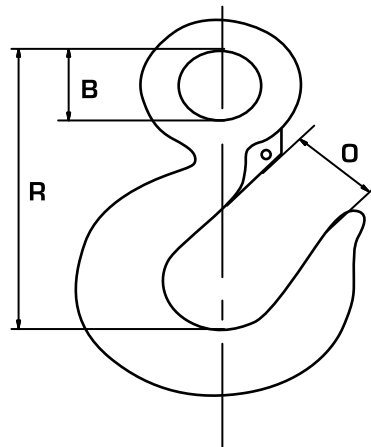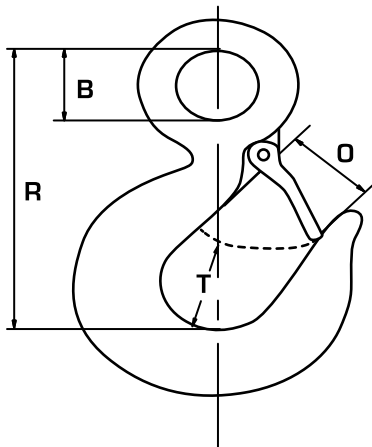

Working Load Limit (tons)		Dimensions (in)					Weight (lbs)
Carbon	Alloy	B	R	O	T	E	
1/2	3/4	0.63	2.80	0.81	0.65	0.87	0.37
3/4	1	0.75	3.22	0.88	0.81	0.94	0.57
1	1 - 1/2	0.91	3.66	0.97	0.81	1.03	0.77
1 - 1/2	2	1.12	4.09	1.00	0.84	1.06	1.28
2	3	1.25	4.69	1.12	1.19	1.22	1.73
3	4 - 1/2	1.56	5.78	1.34	1.38	1.50	3.66
5	7	2.00	7.38	1.69	1.78	1.88	7.19
7 - 1/2	11	2.44	9.06	2.06	2.12	2.25	13.17
10	15	2.83	10.09	2.22	2.72	2.52	22.15

Forged Quenched & Tempered

Sorting Hooks

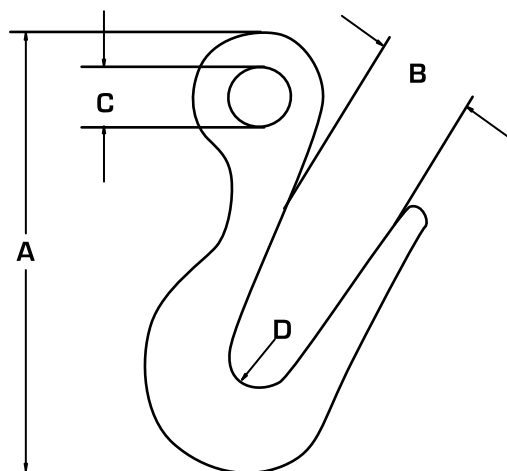

WLL At Tip (tons)	WLL At Bottom (tons)	Weight (lbs)	Dimensions (in)			
			A	B	C	D
2	7 - 1/2	6.25	9 - 11/16	1 - 2/8	2 - 13/16	5/8

Forged alloy steel
Quenched and tempered



Rigging Blocks

Sheave Dia (in)	WLL (tons)	Weight (lbs)
3	0.75	0.75
4	1	1



Light Type Snatch Blocks, Painted

Sheave Dia (in)	WLL (tons)	Weight (lbs)	Rope Dia (in)	End Fitting
3	2	4.97	3/8	Hook
3	2	3.08	3/8	Shackle
4 1/2	4	12.67	1/2	Hook
4 1/2	4	13.77	1/2	Shackle
6	8	26.40	3/4	Hook
6	8	27.54	3/4	Shackle
8	8	34.76	3/4	Hook
8	8	35.86	3/4	Shackle
10	8	41.80	3/4	Hook
10	8	42.90	3/4	Shackle
12	8	48.40	3/4	Hook
12	8	49.57	3/4	Shackle
14	8	55.00	3/4	Hook
14	8	56.17	3/4	Shackle
16	15	129.80	7/8	Hook
16	15	136.40	7/8	Shackle
18	15	151.80	1	Hook
18	15	158.40	1	Shackle

Electro Galvanized



Hay Forks Pulley

Sheave Dia (in)	WLL (tons)	Weight (lbs)	Std Rope Size (in)
4	1	6.38	1 1/4 MR
4	1	6.29	1/2 WR
6	2	14.63	1 1/2 MR
6	2	13.42	5/8 WR



Electro Galvanized

Manila Snatch Block

Sheave Dia (in)	WLL (tons)	Weight (lbs)	End Fitting
6	1200	9.02	Eye
6	1200	9.57	Hook
8	2400	13.20	Eye
8	2400	14.30	Hook
10	4800	26.40	Eye
10	4800	28.60	Hook
12	9600	52.80	Eye
12	9600	57.20	Hook



Electro Galvanized

Try Net Block

Sheave Dia (in)	WLL (tons)	Weight (lbs)	Sheave Dimensions (in)	
			Outside Dia	Rim Thickness
6	5	23.13	6	2 - 3/4
8	10	57.2	8	2 - 7/8



Electro Galvanized

Trawl Block


Sheave Dia (in)	WLL (tons)	Weight (lbs)	Sheave Dimensions (in)	
			Outside Dia	Rim Thickness
8	10	60.72	8	3.75
12	10	90.2	12	3.75
16	20	139.7	16	3.75



Electro Galvanized




Eye & Eye Swivels

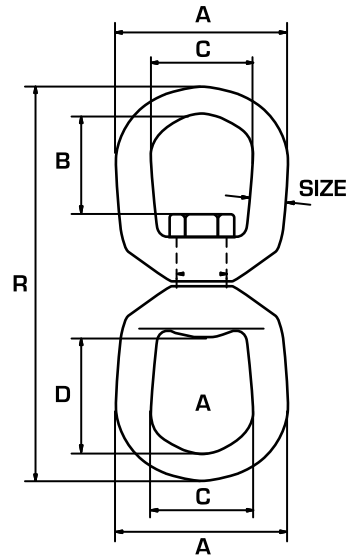

Size (in)	W.L.L. (lbs)	Dimensions (in)					Weight (lbs)
		A	B	C	D	R	
1/4	850	1 - 1/4	11/16	3/4	1 - 1/16	2 - 15/16	0.21
5/16	1,250	1 - 5/8	13/16	1	1 - 1/4	3 - 9/16	0.39
3/8	2,250	2	15/16	1 - 1/4	1 - 1/2	4 - 5/16	0.75
1/2	3,600	2 - 1/2	15/16	1 - 1/2	2	5 - 7/16	1.43
5/8	5,200	3	19/16	1 - 3/4	2 - 3/8	6 - 9/16	2.50
3/4	7,200	3 - 1/2	1 - 3/4	2	2 - 5/8	7 - 3/16	4.13
7/8	10,000	4	2 - 1/16	2 - 1/4	3 - 1/16	8 - 3/8	6.25
1	12,500	4 - 1/2	2 - 5/16	2 - 1/2	3 - 1/2	9 - 5/8	9.00
1 - 1/8	16,500	5	2 - 3/8	3 - 3/4	3 - 3/4	7 - 7/32	11
1 - 1/4	18,000	1 - 5/8	2 - 11/16	3 - 1/8	2 - 11/16	11 - 1/8	16.37
1 - 1/2	45,200	7	4 - 3/16	4	4 - 3/16	17 - 1/8	49.06

Forged, Quenched & Tempered.
Hot Dip Galvanized.



Jaw & Eye Swivels

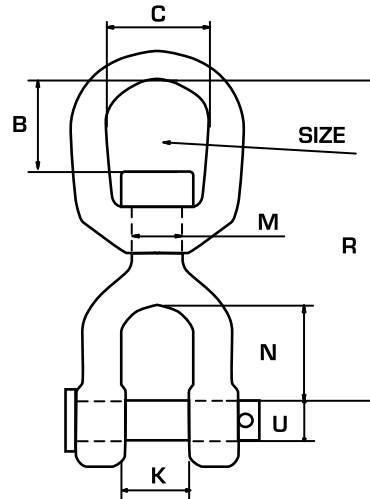

Size (in)	W.L.L. (lbs)	Dimensions (in)							Weight (lbs)
		B	C	K	M	N	P	R	
1/4	850	0.69	0.75	0.47	0.31	0.88	0.25	2.63	0.21
5/16	1,250	0.81	1.00	0.50	0.38	0.88	0.31	2.94	0.34
3/8	2,250	0.94	1.25	0.63	0.50	1.06	0.38	3.63	0.66
1/2	3,600	1.31	1.50	0.75	0.63	1.31	0.50	4.50	1.34
5/8	5,200	1.56	1.75	0.94	0.75	1.50	0.63	5-31	2.48
3/4	7,200	1.75	2.00	1.13	0.88	1.75	0.75	6.06	3.88
7/8	10,000	2.06	2.25	1.19	1.00	2.06	0.88	7.00	5.87
1	12,500	2.31	2.50	1.75	1.13	2.81	1.13	8.56	9.84
1 - 1/4	18,000	2.69	3.13	2.06	1.50	2.81	1.38	9.44	15.75
1 - 1/2	45,200	4.19	4.00	2.88	2.25	4.44	2.25	14.74	54.75


Forged, Quenched & Tempered.
Hot Dip Galvanized.

Aluminum & Copper Hourglass Sleeves

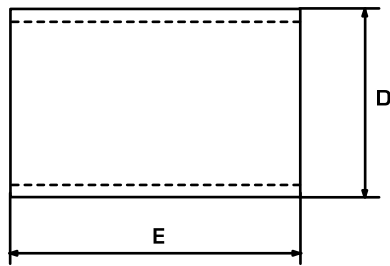

Rope Size & Sleeve Size	C Max	D Max	E Max	No. Presses	After Swage O.D.	Wt./100 pcs (lbs)
1/16	.180	.270	.440	3	0.19	0.3
3/32	.240	.380	.440	3	0.265	0.65
1/8	.340	.512	.750	3	0.353	1.6
5/32	.370	.600	.750	3	0.39	2.3
3/16	.450	.710	1.000	4	0.475	5.1
7/32	.480	.740	.940	4	0.51	4.6
1/4	.540	.840	1.190	4	0.585	7.5
5/16	.680	1.030	1.125	4	0.73	11.9
3/8	.750	1.143	1.312	4	0.795	18
1/2	.980	1.490	1.940	4	1	38.4

Edge™ Carbon Steel Sleeves

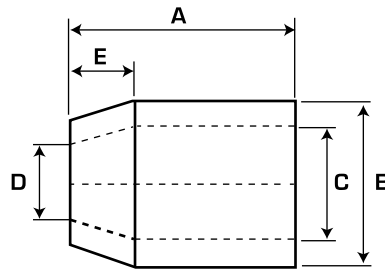

Sleeves available self colored or electro plated

Before Swage Dimensions

DSS Part#	Size	Weight (lbs./ea.)	A	B	C	D	E
CSS14SCD	1/4"	0.05	1.00	0.66	0.47	0.31	0.28
CSS516SCD	5/16"	0.15	1.50	0.91	0.62	0.44	0.44
CSS38SCD	3/8"	0.13	1.50	0.91	0.66	0.47	0.39
CSS716SCD	7/16"	0.33	2.00	1.22	0.85	0.55	0.65
CSS12SCD	1/2"	0.28	2.00	1.22	0.91	0.63	0.56
CSS916SCD	9/16"	0.64	2.75	1.47	1.03	0.69	0.63
CSS58SCD	5/8"	0.56	2.75	1.47	1.09	0.75	0.63
CSS34SCD	3/4"	0.90	3.19	1.72	1.28	0.91	0.84
CSS78SCD	7/8"	1.40	3.56	2.03	1.53	1.03	1.00
CSS1SCD	1"	1.90	4.00	2.28	1.72	1.16	1.13
CSS118SCD	1 1/8"	2.60	4.81	2.50	1.94	1.28	1.25
CSS114SCD	1 1/4"	3.50	5.19	2.78	2.16	1.44	1.41
CSS138SCD	1 3/8"	4.30	5.81	3.00	2.38	1.56	1.56
CSS112SCD	1 1/2"	5.00	6.25	3.25	2.63	1.69	1.69
CSS134SCD	1 3/4"	8.00	7.25	3.84	3.13	1.94	1.97
CSS2SCD	2"	12.00	8.50	4.38	3.63	2.25	2.25
CSS214SCD	2 1/4"	20.00	9.56	5.03	4.03	2.50	2.53
CSS212SCD	2 1/2"	24.00	10.50	5.50	4.50	2.75	2.81
CSS234SCD	2 3/4"	30.00	11.50	5.75	4.70	3.00	3.09
CSS3SCD	3"	31.00	12.00	6.00	5.00	3.25	3.38
CSS312SCD*	3 1/2"	45.00	14.00	7.00	5.84	3.88	3.94
CSS334SCD*	3 3/4"	55.00	15.00	7.50	6.31	4.06	4.25
CSS4SCD*	4"	68.00	16.00	8.13	6.81	4.38	4.50
CSS412SCD*	4 1/2"	100.00	18.00	9.13	7.66	4.88	5.06

* Are available upon request.

For flemish eye slings only. Use with 6x19, 6x36, RRL, Fibre Core and IWRC, and IPS, EIPS, or EEIPS wire rope.


On all other constructions, lays, and grades Dominion recommends test samples to be destructive tested and documented to determine integrity. RESPONSIBILITY for proper swaging, inspection, and testing lies with the fabricator.

www.dominionriggingproducts.com



Master Links


Forged alloy steel
Quenched and tempered



Size (in)	WLL (lbs)	Weight (lbs)	Dimensions (in)				
			A	B	C	D	E
1/2"	7000	0.82	0.50	2.50	5.00	3.50	6.00
5/8"	9000	1.52	0.63	3.00	6.00	4.25	7.00
3/4"	12300	2.07	0.75	2.75	5.50	4.25	7.25
1"	24360	4.85	1.00	3.50	7.00	5.50	9.00
1 1/4"	36200	9.57	1.25	4.38	8.75	6.88	11.25
1 1/2"	54300	16.22	1.50	5.25	10.50	8.25	13.50
1 3/4"	84900	25.22	1.75	6.00	12.00	9.50	15.50
2"	97680	37.04	2.00	7.00	14.00	11.00	18.00


Sling Links

Forged carbon steel
Quenched and tempered

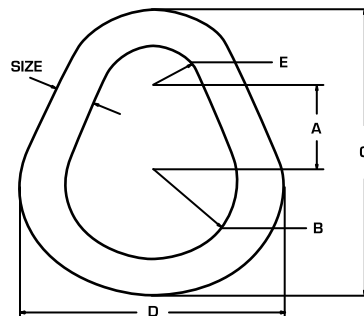

Size (in)	WLL (lbs)	Weight (lbs)	Dimensions (mm)				
			A	B	C	D	E
3/8	1800	0.23	1.13	0.75	3.00	2.25	0.38
1/2	2900	0.55	1.50	1.00	4.00	3.00	0.50
5/8	4200	1.06	1.87	1.25	5.00	3.75	0.63
3/4	6000	1.88	2.25	1.50	6.00	4.50	0.75
7/8	8300	2.75	2.63	1.75	7.00	5.25	0.88
1	10800	4.35	3.00	2.00	8.00	6.00	1.00
1 1/4	16750	7.60	4.00	2.50	10.25	7.50	1.25
1 3/8	20500	11.30	4.13	2.75	11.00	8.25	1.38

Lap Links

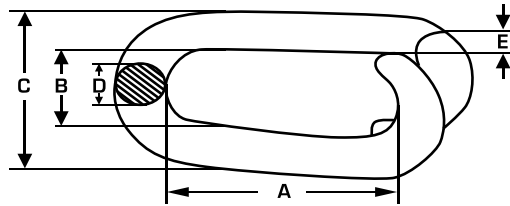

Size (in)	Weight (lbs)	Dimensions (mm)				
		A	B	C	D	E
3/16 x 1	0.005	25	13	23	5	11
1/4 x 1 1/4	0.01	32	12.7	25	6	12.7
5/16 x 1 1/2	0.019	38	16	32	8	16
3/8 x 1 5/8	0.037	41	19	39	10	19
1/2 x 2 1/2	0.07	63.5	25	50	12.5	26

Electro Galvanized

Cold Shuts




Size (in)	WLL (lbs)	Inside Length	Inside Width	Weight (lbs)
3/16	525	1 1/16	5/16	0.06
1/4	925	1 3/16	3/8	0.10
5/16	1450	1 7/16	13/32	0.20
3/8	2110	1 1/4	5/8	0.25
7/16	2850	1 3/8	13/16	0.26
1/2	3750	1 9/16	13/16	0.53
5/8	5850	2 1/4	3/4	0.78
3/4	8425	2 1/2	7/8	1.30
7/8	11475	3 3/8	1	2.00
1	15000	3 7/8	1 3/16	3.25

Electro Galvanized

www.dominionriggingproducts.com




Double Clevis Links



Size (mm)	W.L.L. (lbs)	Dimensions (in)							Weight (lbs)
		A	B	C	D	E	F	R	
1/4	2,600	0.50	0.75	0.50	0.31	0.38	0.75	1.50	0.44
5/16 - 3/8	5,400	0.56	1.00	0.63	0.44	0.47	1.00	1.81	0.81
7/16	7,000	0.69	1.13	0.69	0.56	0.59	1.09	2.19	1.28
1/2	9,200	0.81	1.25	0.75	0.63	0.66	1.25	2.47	1.68
5/8	17,500	0.78	1.63	1.00	0.75	0.83	1.51	3.03	2.91

Quenched & Tempered.


Twin Clevis Links



Size (mm)	W.L.L. (lbs)	Dimensions (in)				Weight (lbs)
		A	D	G	R	
1/4 - 5/16	4,700	0.47	0.38	0.43	1.18	0.32
3/8	6,600	0.53	0.47	0.48	1.34	0.44
7/16 - 1/2	11,250	0.65	0.56	0.63	1.75	1.00
5/8	16,500	0.78	0.69	0.75	2.12	1.32

Quenched & Tempered.

Galvanized Quick Links



Size (in)	Working Load Limit (lbs)	Dimensions (in)				Weight (lbs)
		a	b	c	d	
1/8	220	.19	1.45	.39	1.19	.02
3/16	660	.25	2.06	.50	1.69	.05
1/4	880	.31	2.38	.56	1.88	.08
5/16	1760	.38	2.94	.69	2.31	.18
3/8	2200	.44	3.19	.69	2.44	.23
1/2	3300	.56	4.25	.94	3.25	.52

Galvanized Spring Snap Hooks



Size		O.L		Working Load Limit (lbs)	Weight (lbs)
inch	mm	inch	mm		
3/16	5	2	50	220	0.044
1/4	6	2.36	60	260	0.077
5/16	8	3.16	80	500	0.172
3/8	10	4	100	550	0.243
7/16	11	4.75	120	770	0.298
1/2	12	5.5	140	1,200	0.551

