


Malleable Wire Rope Clips

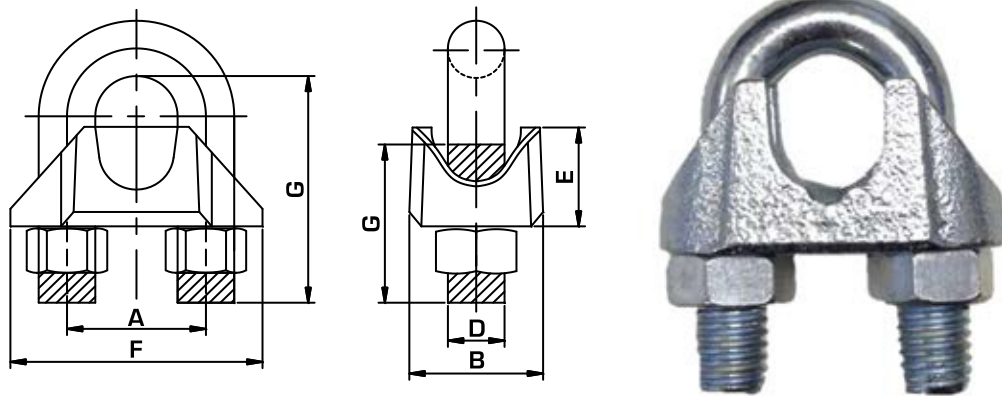

FF-C-450 Type 1 Class 2

Size (In)	Dimensions (in.)							Weight Per
	A	B	C	D	E	F	G	100 (lbs.)
1/16	1/16	.45	.45	0.15	.38	.69	.65	3
1/8	1/8	.55	.55	0.18	.42	.87	.79	4
3/16	3/16	.59	.63	0.25	.51	1.02	.94	6.3
1/4	1/4	.73	.79	0.31	.59	1.25	1.24	13
5/16	5/16	.79	.87	0.31	.63	1.38	1.34	15
3/8	3/8	.87	1.06	0.38	.87	1.59	1.65	21
7/16	7/16	.91	1.18	0.44	.87	1.70	1.69	37
1/2	1/2	1.02	1.38	0.44	.92	1.93	2.12	37
9/16	9/16	1.04	1.58	0.50	1.06	2.07	2.15	59
5/8	5/8	1.12	1.58	0.50	1.10	2.26	2.33	59
3/4	3/4	1.26	1.65	0.56	1.33	2.40	2.70	84
7/8	7/8	1.46	1.81	0.63	1.50	2.80	3.08	125
1	1	1.65	2.2	0.63	1.69	3.05	3.44	166
1 1/8	1 1/8	2.06	2.75	0.75	2.19	3.38	4.00	243

Electro Galvanized

Minimum number of malleable clips
to use based on rope size:

1/8" — 3/8" / 2 Clips

7/16" — 5/8" / 3 Clips

3/4" — 7/8" / 4 Clips