


Jaw & Eye Turnbuckles



Thread Dia & Take Up (in)	WLL (lbs)	Weight Each (lbs)	Dimensions (in)											
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
1/4x4	500	0.32	0.25	0.45	1.58	0.62	11.35	7.35	12.07	8.07	0.78	0.34	1.75	4.00
5/16x4-1/2	800	0.47	0.31	0.50	1.98	0.87	13.71	8.71	14.01	9.51	0.94	0.44	2.09	4.50
3/8x6	1200	0.76	0.38	0.54	2.12	0.87	16.81	10.81	17.77	11.77	1.12	0.53	2.52	6.00
1/2x6	2200	1.53	0.50	0.68	2.75	1.06	18.29	12.29	19.48	13.48	1.44	0.72	3.23	6.00
1/2x9	2200	1.71	0.50	0.68	2.75	1.06	24.29	15.29	25.48	16.48	1.44	0.72	3.23	9.00
1/2x12	2200	2.06	0.50	0.68	2.75	1.06	30.29	18.29	31.48	19.48	1.44	0.72	3.23	12.00
5/8x6	3500	2.35	0.63	0.82	3.50	1.31	19.74	13.74	21.28	15.28	1.75	0.88	3.90	6.00
5/8x9	3500	3.06	0.63	0.82	3.50	1.31	25.74	16.74	27.28	18.28	1.75	0.88	3.90	9.00
5/8x12	3500	3.78	0.63	0.82	3.50	1.31	31.74	19.74	33.28	21.28	1.75	0.88	3.90	12.00
3/4x6	5200	4.00	0.75	1.03	4.18	1.50	21.19	15.19	23.11	17.11	2.09	1.00	4.69	6.00
3/4x9	5200	4.75	0.75	1.03	4.18	1.50	27.19	18.19	29.11	20.11	2.09	1.00	4.69	9.00
3/4x12	5200	5.36	0.75	1.03	4.18	1.50	33.19	21.19	35.11	23.11	2.09	1.00	4.69	12.00
3/4x18	5200	7.00	0.75	1.03	4.18	1.50	45.19	27.19	47.11	29.11	2.09	1.00	4.69	18.00
7/8x12	7200	8.00	0.88	1.23	4.85	1.75	34.34	22.34	36.57	24.57	2.38	1.25	5.10	12.00
7/8x18	7200	9.75	0.88	1.23	4.85	1.75	46.34	28.34	48.57	30.57	2.38	1.25	5.10	18.00
1x6	10000	8.92	1.00	1.31	5.53	2.06	24.34	18.34	26.89	20.89	3.00	1.44	6.36	6.00
1x12	10000	11.20	1.00	1.31	5.53	2.06	36.34	24.34	38.89	26.89	3.00	1.44	6.36	12.00
1x18	10000	13.30	1.00	1.31	5.53	2.06	48.34	30.34	50.89	32.89	3.00	1.44	6.36	18.00
1x24	10000	17.00	1.00	1.31	5.53	2.06	60.34	36.34	62.89	38.89	3.00	1.44	6.36	24.00
1-1/4x12	15200	20.00	1.25	1.86	7.21	2.81	38.82	26.82	42.05	30.05	3.56	1.81	7.72	12.00
1-1/4x18	15200	24.18	1.25	1.86	7.21	2.81	50.82	32.82	54.05	36.05	3.56	1.81	7.72	18.00
1-1/4x24	15200	28.50	1.25	1.86	7.21	2.81	62.82	38.82	66.05	42.05	3.56	1.81	7.72	24.00
1-1/2x12	21400	28.99	1.50	2.25	7.88	2.81	40.50	28.50	44.25	32.25	4.06	2.12	8.62	12.00
1-1/2x18	21400	35.00	1.50	2.25	7.88	2.81	52.50	34.50	56.25	38.25	4.06	2.12	8.62	18.00
1-1/2x24	21400	39.18	1.50	2.25	7.88	2.81	64.50	40.50	68.25	44.25	4.06	2.12	8.62	24.00
1-3/4x18	28000	53.75	1.75	2.60	9.40	3.38	55.38	37.38	59.78	41.78	4.62	2.38	10.00	18.00
1-3/4x24	28000	60.68	1.75	2.60	9.40	3.38	67.38	43.38	71.78	47.78	4.62	2.38	10.00	24.00
2x24	37000	89.00	2.00	2.62	11.86	3.69	72.62	48.62	77.95	53.95	5.75	2.69	13.09	24.00

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

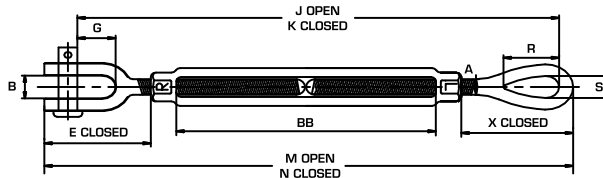