


Hook & Hook Turnbuckles

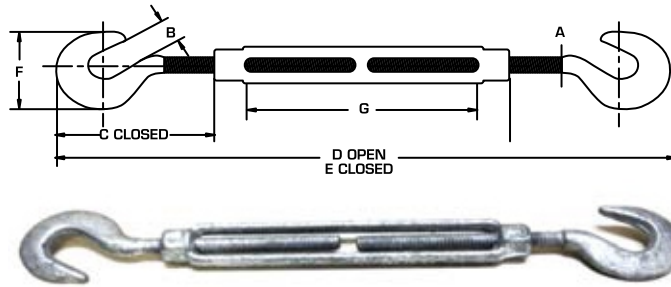

Thread Dia & Take Up (in)	WLL (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B	C Closed	D Open	E Closed	F	G
1/4 x 4	400	0.3	0.25	0.45	1.59	11.94	7.94	1.27	4
5/16 x 4 1/2	700	0.47	0.31	0.5	1.94	13.81	9.31	1.5	4.5
3/8 x 6	1000	0.75	0.38	0.56	2.3	17.72	11.72	1.77	6
1/2 x 6	1500	1.6	0.5	0.66	2.94	19.38	13.38	2.28	6
1/2 x 9	1500	1.83	0.5	0.66	2.94	25.38	16.38	2.28	9
1/2 x 12	1500	2.08	0.5	0.66	2.94	31.38	19.38	2.28	12
5/8 x 6	2250	2.75	0.63	0.84	3.69	21.25	15.25	2.81	6
5/8 x 9	2250	3.13	0.63	0.84	3.69	27.25	18.25	2.81	9
5/8 x 12	2250	3.5	0.63	0.84	3.69	33.25	21.25	2.81	12
3/4 x 6	3000	3.89	0.75	0.98	4.52	23.28	17.28	3.33	6
3/4 x 9	3000	4.61	0.75	0.98	4.52	29.28	20.28	3.33	9
3/4 x 12	3000	5.43	0.75	0.98	4.52	35.28	23.28	3.33	12
3/4 x 18	3000	7.25	0.75	0.98	4.52	47.28	29.28	3.33	18
7/8 x 12	4000	8.1	0.88	1.13	5.19	37	25	3.78	12
7/8 x 18	4000	9.95	0.88	1.13	5.19	49	31	3.78	18
1 x 6	5000	9.33	1	1.25	5.84	26.69	20.69	4.25	6
1 x 12	5000	11.93	1	1.25	5.84	38.69	26.69	4.25	12
1 x 18	5000	14	1	1.25	5.84	50.69	23.69	4.25	18
1 x 24	5000	17.25	1	1.25	5.84	62.69	38.69	4.25	24
1 1/4 x 12	6500	19	1.25	1.5	7.22	41.56	29.56	5.13	12
1 1/4 x 18	6500	23	1.25	1.5	7.22	53.56	35.56	5.13	18
1 1/4 x 24	6500	27	1.25	1.5	7.22	65.56	41.56	5.13	24
1 1/2 x 12	7500	27.5	1.5	1.88	8.34	44.44	32.44	5.75	12
1 1/2 x 18	7500	31	1.5	1.88	8.34	56.44	38.44	5.75	18
1 1/2 x 24	7500	37.5	1.5	1.88	8.34	68.44	44.44	5.75	24

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized