


## Turnbuckles - Body Only

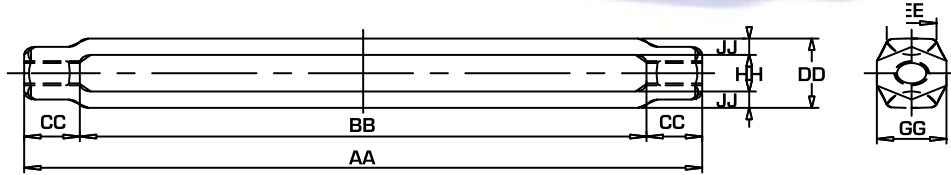

| Shank Dia. & Take Up (in) | Working Load Limit (lbs) | Weight Each (lbs) | Dimensions (in) |       |      |      |      |      |      |      |
|---------------------------|--------------------------|-------------------|-----------------|-------|------|------|------|------|------|------|
|                           |                          |                   | AA              | BB    | CC   | DD   | EE   | GG   | HH   | JJ   |
| 1/4x4                     | 500                      | 0.15              | 4.87            | 4.07  | 0.40 | 0.72 | 0.34 | 0.50 | 0.38 | 0.17 |
| 5/16x4-1/2                | 800                      | 0.22              | 5.59            | 4.58  | 0.51 | 0.82 | 0.38 | 0.56 | 0.44 | 0.19 |
| 3/8x6                     | 1200                     | 0.29              | 7.29            | 6.10  | 0.60 | 0.88 | 0.38 | 0.63 | 0.50 | 0.19 |
| 1/2x6                     | 2200                     | 0.70              | 7.70            | 6.03  | 0.84 | 1.19 | 0.68 | 0.81 | 0.63 | 0.28 |
| 1/2x9                     | 2200                     | 1.03              | 11.03           | 9.36  | 0.84 | 1.19 | 0.68 | 0.81 | 0.63 | 0.28 |
| 1/2x12                    | 2200                     | 1.27              | 14.03           | 12.36 | 0.84 | 1.19 | 0.68 | 0.81 | 0.63 | 0.28 |
| 5/8x6                     | 3500                     | 1.11              | 8.02            | 6.03  | 1.00 | 1.43 | 0.83 | 1.00 | 0.75 | 0.34 |
| 5/8x9                     | 3500                     | 1.59              | 11.38           | 9.36  | 1.00 | 1.43 | 0.83 | 1.00 | 0.75 | 0.34 |
| 5/8x12                    | 3500                     | 1.96              | 14.38           | 12.39 | 1.00 | 1.43 | 0.83 | 1.00 | 0.75 | 0.34 |
| 3/4x6                     | 5200                     | 1.50              | 8.26            | 6.13  | 1.07 | 1.74 | 0.94 | 1.13 | 0.94 | 0.40 |
| 3/4x9                     | 5200                     | 2.17              | 11.72           | 9.59  | 1.07 | 1.74 | 0.94 | 1.13 | 0.94 | 0.40 |
| 3/4x12                    | 5200                     | 2.66              | 14.72           | 12.59 | 1.07 | 1.74 | 0.94 | 1.13 | 0.94 | 0.40 |
| 3/4x18                    | 5200                     | 3.63              | 20.66           | 18.56 | 1.07 | 1.74 | 0.94 | 1.13 | 0.94 | 0.40 |
| 7/8x12                    | 7200                     | 3.61              | 14.62           | 12.16 | 1.23 | 2.00 | 1.13 | 1.31 | 1.06 | 0.47 |
| 7/8x18                    | 7200                     | 5.27              | 21.09           | 18.63 | 1.23 | 2.00 | 1.13 | 1.31 | 1.06 | 0.47 |
| 1x6                       | 10000                    | 3.32              | 9.00            | 6.18  | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | 0.60 |
| 1x12                      | 10000                    | 5.34              | 15.00           | 12.18 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | 0.60 |
| 1x18                      | 10000                    | 7.35              | 21.00           | 18.18 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | 0.60 |
| 1x24                      | 10000                    | 9.85              | 27.66           | 24.84 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | 0.60 |
| 1-1/4x12                  | 15200                    | 5.75              | 15.40           | 12.06 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | 0.56 |
| 1-1/4x18                  | 15200                    | 7.58              | 21.40           | 18.06 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | 0.56 |
| 1-1/4x24                  | 15200                    | 9.45              | 27.96           | 24.62 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | 0.56 |
| 1-1/2x12                  | 21400                    | 8.01              | 15.82           | 12.32 | 1.75 | 2.99 | 1.50 | 2.25 | 1.75 | 0.62 |