



Shoulder Nut Eye Bolts

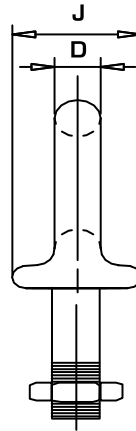

Shank Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Per 100 (lbs)	Dimensions (in)								
			A	B	C	D	E	F	G	H	J
1/4X2	500	6.61	0.25	0.50	0.88	0.19	1.50	2.00	2.94	0.50	0.47
1/4X4	500	8.61	0.25	0.50	0.88	0.19	2.50	4.00	4.94	0.50	0.47
5/16X2 1/4	800	12.50	0.31	0.62	1.12	0.25	1.50	2.25	3.50	0.69	0.56
5/16X4 1/4	800	18.75	0.31	0.62	1.12	0.25	2.50	4.25	5.50	0.69	0.56
3/8X2 1/2	1200	19.00	0.38	0.75	1.38	0.31	1.50	2.50	3.97	0.78	0.66
3/8X4 1/2	1200	31.58	0.38	0.75	1.38	0.31	2.50	4.50	5.97	0.78	0.66
1/2X3 1/4	2200	37.50	0.50	1.00	1.75	0.38	1.50	3.25	5.12	1.00	0.91
1/2X6	2200	56.25	0.50	1.00	1.75	0.38	3.00	6.00	7.88	1.00	0.91
5/8X4	3500	75.00	0.62	1.25	2.25	0.50	2.00	4.00	6.44	1.31	1.12
5/8X6	3500	100.25	0.62	1.25	2.25	0.50	3.00	6.00	8.44	1.31	1.12
3/4X4 1/2	5200	125.00	0.75	1.50	2.75	0.62	2.00	4.50	7.44	1.56	1.38
3/4X6	5200	150.00	0.75	1.50	2.75	0.62	3.00	6.00	8.94	1.56	1.38
7/8X5	7200	225.00	0.88	1.75	3.25	0.75	2.50	5.00	8.47	1.84	1.56
1X6	10000	375.00	1.00	2.00	3.75	0.88	3.00	6.00	9.97	2.09	1.81
1X9	10000	429.00	1.00	2.00	3.75	0.88	4.00	9.00	12.97	2.09	1.81
1 1/4X8	15200	650.00	1.25	2.50	4.50	1.00	4.00	8.00	12.72	2.47	2.28
1 1/4X12	15200	775.00	1.25	2.50	4.50	1.00	4.00	12.00	16.72	2.47	2.28
1 1/2X15	21400	1425.00	1.50	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75

Hot dip galvanized • Forged steel, quenched and tempered

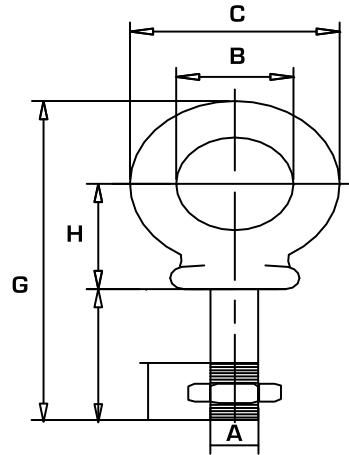