


Shoulder Type Machinery Eye Bolts

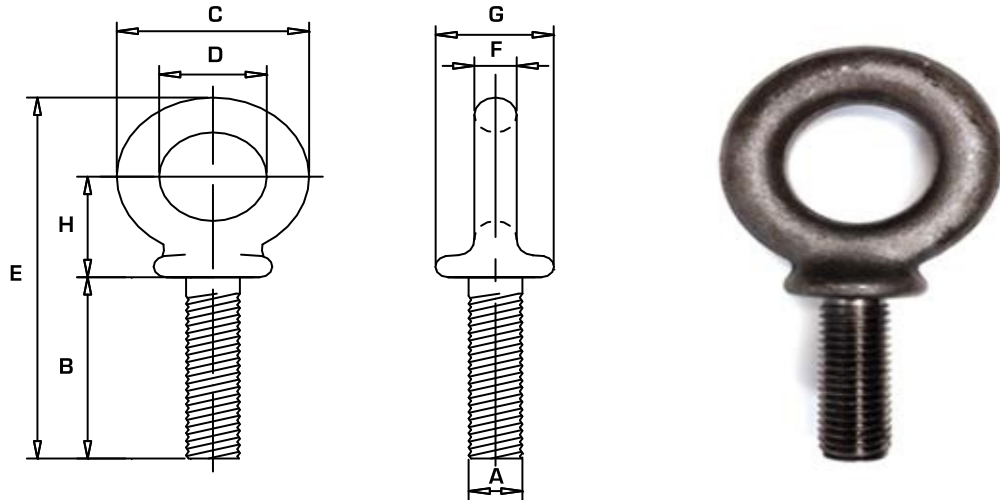

Shank Dia. & Thread (in)	Working Load Limit (lbs)	Weight Per 100 (lbs)	Dimensions (in)							
			A	B	C	D	E	F	G	H
1/4X1	500	3.20	0.25	1.00	0.88	0.50	1.94	0.19	0.47	0.50
5/16X1 1/8	800	6.20	0.31	1.13	1.12	0.62	2.38	0.25	0.56	0.69
3/8X1 1/4	1200	12.50	0.38	1.25	1.38	0.75	2.72	0.31	0.66	0.78
1/2X1 1/2	2200	25.00	0.50	1.50	1.75	1.00	3.38	0.38	0.91	1.00
5/8X1 3/4	3500	50.00	0.63	1.75	2.25	1.25	4.19	0.50	1.12	1.31
3/4X2	5200	87.50	0.75	2.00	2.75	1.50	4.94	0.62	1.38	1.56
7/8X2 1/4	7200	150.00	0.88	2.25	3.25	1.75	5.72	0.75	1.56	1.84
7/8X2 1/2	7200	150.00	0.88	2.50	3.25	1.75	5.72	0.75	1.56	1.84
1X2 1/2	10000	218.00	1.00	2.50	3.75	2.00	6.47	0.88	1.81	2.09
1 1/4X3	15200	380.00	1.25	3.00	4.50	2.50	7.72	1.00	2.28	2.47
1 1/2X3 1/2	21400	700.00	1.50	3.50	5.50	3.00	9.25	1.25	2.75	3.00