



Clevis Slip Hooks



Size of Chain (in)	Working Load Limit (lbs)		Dimensions (in.)				Weight (lbs)
	Carbon	Alloy	A	B	C	D	
1/4	1950	2750	0.44	0.94	0.38	2.56	0.50
5/16	2875	4300	0.50	1.06	0.44	2.87	0.75
3/8	4000	5250	0.59	1.31	0.47	3.25	1.20
7/16	5000	7000	0.66	1.56	0.56	3.70	2.06
1/2	6500	9000	0.75	1.69	0.63	4.00	2.80
5/8	9250	13500	0.91	2.00	0.75	4.94	4.75
3/4	12500	19250	1.31	2.50	1.00	6.09	10.30

G43 forged carbon steel • G70 forged alloy steel • Quenched and tempered

Latch Kits

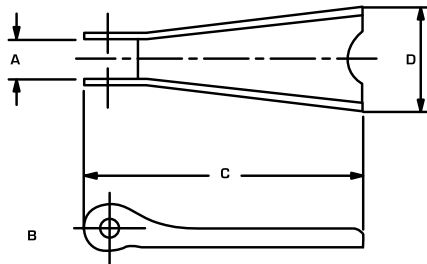

Hook size (tons)		Dimensions (in)				Weight (lbs)
Carbon	Alloy	R	O	T	E	
1/2	3/4	0.36	0.14	1.30	0.51	0.02
3/4	1	0.41	0.14	1.48	0.59	0.02
1	1 1/2	0.41	0.14	1.84	0.67	0.02
1 1/2	2	0.49	0.18	1.84	0.75	0.03
2	3	0.49	0.18	2.02	0.87	0.03
3	4 1/2	0.63	0.18	2.41	1.00	0.06
5	7	0.71	0.20	2.99	1.42	0.11
7 1/2	11	0.79	0.20	3.68	1.57	0.17

Stainless steel or galvanized carbon steel construction with spring, bolt and nut

