


Edge™ Carbon Steel Sleeves

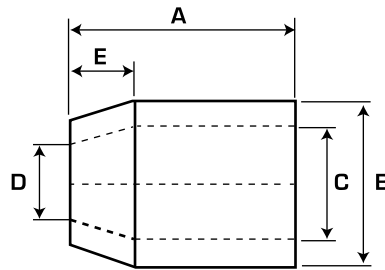

Sleeves available self colored or electro plated

Before Swage Dimensions

DSS Part#	Size	Weight (lbs./ea.)	A	B	C	D	E
CSS14SCD	1/4"	0.05	1.00	0.66	0.47	0.31	0.28
CSS516SCD	5/16"	0.15	1.50	0.91	0.62	0.44	0.44
CSS38SCD	3/8"	0.13	1.50	0.91	0.66	0.47	0.39
CSS716SCD	7/16"	0.33	2.00	1.22	0.85	0.55	0.65
CSS12SCD	1/2"	0.28	2.00	1.22	0.91	0.63	0.56
CSS916SCD	9/16"	0.64	2.75	1.47	1.03	0.69	0.63
CSS58SCD	5/8"	0.56	2.75	1.47	1.09	0.75	0.63
CSS34SCD	3/4"	0.90	3.19	1.72	1.28	0.91	0.84
CSS78SCD	7/8"	1.40	3.56	2.03	1.53	1.03	1.00
CSS1SCD	1"	1.90	4.00	2.28	1.72	1.16	1.13
CSS118SCD	1 1/8"	2.60	4.81	2.50	1.94	1.28	1.25
CSS114SCD	1 1/4"	3.50	5.19	2.78	2.16	1.44	1.41
CSS138SCD	1 3/8"	4.30	5.81	3.00	2.38	1.56	1.56
CSS112SCD	1 1/2"	5.00	6.25	3.25	2.63	1.69	1.69
CSS134SCD	1 3/4"	8.00	7.25	3.84	3.13	1.94	1.97
CSS2SCD	2"	12.00	8.50	4.38	3.63	2.25	2.25
CSS214SCD	2 1/4"	20.00	9.56	5.03	4.03	2.50	2.53
CSS212SCD	2 1/2"	24.00	10.50	5.50	4.50	2.75	2.81
CSS234SCD	2 3/4"	30.00	11.50	5.75	4.70	3.00	3.09
CSS3SCD	3"	31.00	12.00	6.00	5.00	3.25	3.38
CSS312SCD*	3 1/2"	45.00	14.00	7.00	5.84	3.88	3.94
CSS334SCD*	3 3/4"	55.00	15.00	7.50	6.31	4.06	4.25
CSS4SCD*	4"	68.00	16.00	8.13	6.81	4.38	4.50
CSS412SCD*	4 1/2"	100.00	18.00	9.13	7.66	4.88	5.06

* Are available upon request.

For flemish eye slings only. Use with 6x19 ,6x36 ,RRL,Fibre Core and IWRC, and IPS,EIPS, or EEIPS wire rope.

On all other constructions, lays, and grades Dominion recommends test samples to be destructive tested and documented to determine integrity. RESPONSIBILITY for proper swaging, inspection, and testing lies with the fabricator.

www.dominionriggingproducts.com

