


Connecting Link Code "YA "

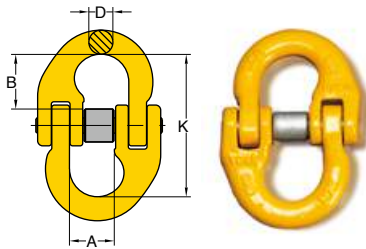

ABS
Type Approval

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)				N.W. lbs
	lbs*	tonnes*		A	B	D	K	
8-015-05	1,500	0.8	3/16	0.39	0.51	0.24	1.39	0.08
8-015-06	2,500	1.12	7/32	0.59	0.67	0.28	1.73	0.2
8-015-07	4,500	2.0	1/4-5/16	0.71	0.89	0.35	2.25	0.4
8-015-10	7,100	3.15	3/8	0.99	1.06	0.50	2.68	0.7
8-015-13	12,000	5.3	1/2	1.19	1.38	0.62	3.58	1.5
8-015-16	18,100	8.0	5/8	1.42	1.51	0.75	3.94	2.4
8-015-20	28,300	12.5	3/4	1.65	1.81	0.87	4.80	4.2
8-015-22	34,200	15.0	7/8	1.93	2.32	0.94	5.98	6.6
8-015-26	47,700	21.2	1	2.17	2.44	1.19	6.38	10.4
8-015-32	72,300	31.5	1-1/4	2.72	3.11	1.42	7.96	19.4


★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Connecting Link

Dacromet® Surface Finish. **



special pin and sleeve
designed for more
often re-use purpose.

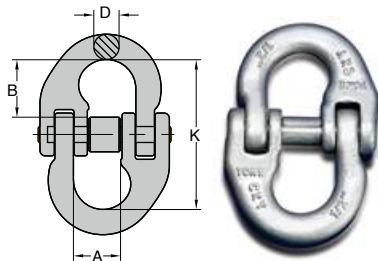


ABS
Type Approval

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)				N.W. lbs
	lbs*	tonnes*		A	B	D	K	
8-M015-05	1,500	0.8	3/16	0.39	0.51	0.24	1.39	0.08
8-M015-06	2,500	1.12	7/32	0.59	0.67	0.28	1.73	0.2
8-M015-07	4,500	2.0	1/4-5/16	0.71	0.89	0.35	2.25	0.4
8-M015-10	7,100	3.15	3/8	0.99	1.06	0.50	2.68	0.7
8-M015-13	12,000	5.3	1/2	1.19	1.38	0.62	3.58	1.5
8-M015-16	18,100	8.0	5/8	1.42	1.51	0.75	3.94	2.4
8-M015-20	28,300	12.5	3/4	1.65	1.81	0.87	4.80	4.2
8-M015-22	34,200	15.0	7/8	1.93	2.32	0.94	5.98	6.6
8-M015-26	47,700	21.2	1	2.17	2.44	1.19	6.38	10.4
8-M015-32	72,300	31.5	1-1/4	2.72	3.11	1.42	7.96	19.4

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Omega Link. Code "YO"

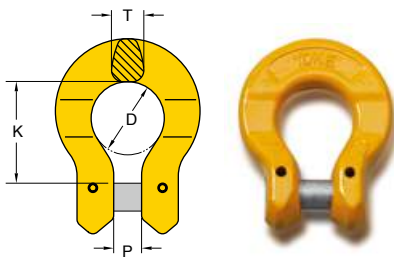

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)				N.W. lbs
	lbs*	tonnes*		D	K	P	T	
8-018-06	2,500	1.12	7/32	0.83	1.18	0.31	0.35	0.2
8-018-07	4,500	2.0	1/4-5/16	1.06	1.42	0.35	0.44	0.4
8-018-10	7,100	3.15	3/8	1.26	1.73	0.47	0.59	0.9
8-018-13	12,000	5.3	1/2	1.65	2.17	0.62	0.67	1.8
8-018-16	18,100	8.0	5/8	1.96	2.72	0.71	0.89	3.3
8-018-20	28,300	12.5	3/4	2.28	3.15	0.85	1.08	4.6

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

