


Swivel Self Locking Hook. Code" YE "

with Brass Bushing

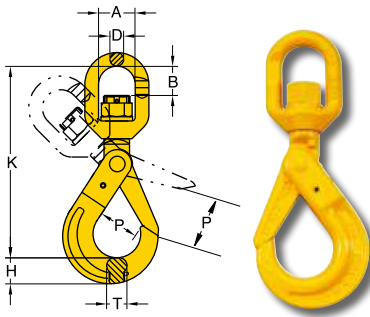


Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)							N.W.
	lbs*	tonnes*	inch	A	B	D	H	K	P	T	lbs
8-027-06	2,500	1.12	7/32	1.26	0.87	0.44	0.75	5.86	1.14	0.59	1.5
8-027-07	4,500	2.0	1/4-5/16	1.42	1.14	0.51	0.94	7.32	1.34	0.79	2.6
8-027-10	7,100	3.15	3/8	1.63	1.34	0.62	1.19	8.66	1.77	1.02	4.4
8-027-13	12,000	5.3	1/2	1.81	1.70	0.83	1.57	10.51	2.09	1.19	9.0
8-027-16	18,100	8.0	5/8	2.36	1.97	0.91	1.93	12.91	2.44	1.42	15.9
8-027-20	28,300	12.5	3/4	2.91	3.23	1.02	2.36	15.28	3.54	1.91	24.9
8-027-22	34,200	15.0	7/8	3.82	3.74	1.30	2.48	17.99	3.14	2.12	39.5
8-027-26	47,700	21.2	1	4.13	4.53	1.65	2.72	21.06	3.90	2.20	62.4

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

⚠ **WARNING INFORMATION:** This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see p.129 8-027N.

Swivel Self Locking Hook. Code "YEN"


with Ball Bearing, which performs full swivel underload

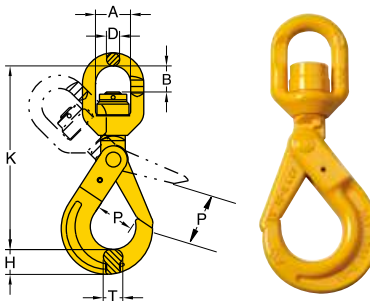

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)							N.W.
	lbs*	tonnes*	inch	A	B	D	H	K	P	T	lbs
8-027N-06	2,500	1.12	7/32	1.26	0.87	0.44	0.75	5.86	1.14	0.59	1.5
8-027N-07	4,500	2.0	1/4-5/16	1.42	1.14	0.51	0.94	7.32	1.34	0.79	2.6
8-027N-10	7,100	3.15	3/8	1.63	1.34	0.62	1.19	8.66	1.77	1.02	4.4
8-027N-13	12,000	5.3	1/2	1.81	1.70	0.83	1.57	10.51	2.09	1.19	9.0
8-027N-16	18,100	8.0	5/8	2.36	1.97	0.91	1.93	12.91	2.44	1.42	16.1
8-027N-20	28,300	12.5	3/4	2.91	3.23	1.02	2.36	15.28	3.54	1.91	25.1
8-027N-22	34,200	15.0	7/8	3.82	3.74	1.30	2.48	17.99	3.14	2.12	39.9
8-027N-26	47,700	21.2	1	4.13	4.53	1.65	2.72	21.06	3.90	2.20	65.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Shank Self Locking Hook. Code "YEA"

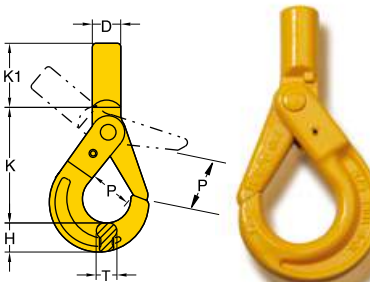

Item No.	Working Load Limit		Dimensions (inch)							N.W.
	lbs*	tonnes*	D	d min.**	H	K	K1	P	T	lbs
8-024-06	2,500	1.12	0.83	0.44	0.75	3.54	1.46	1.14	0.59	1.1
8-024-07	4,500	2.0	1.98	0.51	0.94	4.53	1.69	1.38	0.79	2.0
8-024-10	7,100	3.15	1.14	0.62	1.19	5.31	1.89	1.77	1.02	3.3
8-024-13	12,000	5.3	1.34	0.79	1.57	6.73	2.52	2.09	1.19	6.6
8-024-16	18,100	8.0	1.46	0.98	1.93	8.03	2.95	2.44	1.42	12.1
8-024-20	28,300	12.5	1.69	1.50	2.36	8.62	3.54	3.54	1.91	19.0
8-024-22	34,200	15.0	2.01	1.77	2.48	9.88	4.53	3.14	2.12	26.0
8-024-26	47,700	21.2	2.56	1.97	2.72	10.67	5.94	3.90	2.20	37.2

** d min. = the smallest shank dimension after machining.

Note: After machining the shank, proof loading must be carried out.

★ Design factor 4:1