


Eye Sling Hook. Code "YP"

with Latch

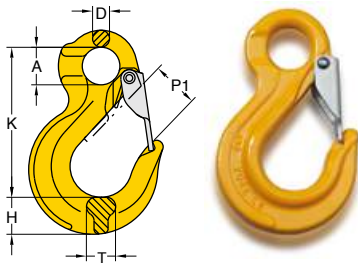

ABS


Type Approval

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)						N.W. lbs
	lbs*	tonnes*		A	D	H	K	P1	T	
8-044/S-06	2,500	1.12	7/32	0.79	0.35	0.79	3.15	0.94	0.63	0.7
8-044/S-07	4,500	2.0	1/4-5/16	0.98	0.43	0.91	3.86	1.18	0.75	1.1
8-044/S-10	7,100	3.15	3/8	1.26	0.59	1.22	4.76	1.42	0.91	2.0
8-044/S-13	12,000	5.3	1/2	1.57	0.71	1.50	5.98	1.69	1.10	4.2
8-044/S-16	18,100	8.0	5/8	1.97	0.87	1.85	7.20	1.85	1.29	7.1
8-044/S-20	28,300	12.5	3/4	2.36	1.06	1.89	8.54	1.77	1.69	12.6
8-044/S-22	34,200	15.0	7/8	2.01	1.26	2.44	9.45	2.75	1.97	20.1
8-044/S-26	47,700	21.2	1	2.60	1.34	3.15	10.63	3.15	2.36	30.0
8-044/S-32	72,300	31.5	1-1/4	3.50	1.57	3.39	13.86	4.49	2.56	41.2

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Eye Sling Hook. Code "EL"

with Latch

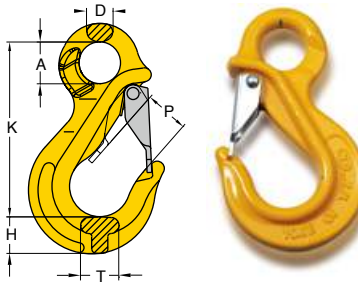


Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)						N.W. lbs
	lbs*	tonnes*		A	D	H	K	P	T	
8-039-06	2,500	1.12	7/32	0.78	0.35	0.75	3.15	0.90	0.63	0.7
8-039-07	4,500	2.0	1/4-5/16	1.02	0.62	0.90	4.29	1.10	0.94	1.5
8-039-10	7,100	3.15	3/8	1.33	0.76	1.18	5.39	1.29	1.02	2.6
8-039-13	12,000	5.3	1/2	1.65	0.90	1.45	6.81	1.57	1.37	5.5
8-039-16	18,100	8.0	5/8	2.04	1.10	1.81	7.28	1.73	1.41	8.2

★ Design factor 4:1 proof tested and certified Tested acc. to EN 1677



Eye Foundry Hook. Code "YN"

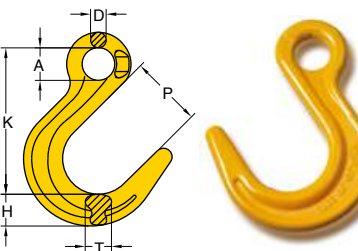

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)						N.W. lbs
	lbs*	tonnes*		A	D	H	K	P	T	
8-047-07	4,500	2.0	1/4-5/16	0.94	0.47	1.18	4.84	2.44	0.79	1.5
8-047-10	7,100	3.15	3/8	1.26	0.59	1.34	5.91	2.87	0.94	2.9
8-047-13	12,000	5.3	1/2	1.56	0.75	1.65	7.09	3.50	1.34	5.3
8-047-16	18,100	8.0	5/8	1.96	0.98	1.97	8.46	3.94	1.63	8.8
8-047-20	28,300	12.5	3/4	2.36	1.10	2.25	9.76	4.41	1.81	20.7

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677