


Clevis Sling Hook. Code"YM"

with Latch

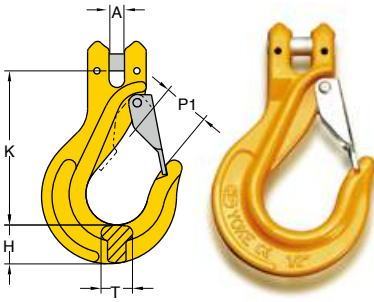


Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	H	K	P1	T	
8-043/S-06	2,500	1.12	7/32	0.24	0.70	3.07	0.87	0.59	0.7
8-043/S-07	4,500	2.0	1/4-5/16	0.35	0.91	3.74	1.18	0.75	1.3
8-043/S-10	7,100	3.15	3/8	0.43	1.14	4.72	1.42	0.91	2.6
8-043/S-13	12,000	5.3	1/2	0.55	1.50	5.79	1.73	1.10	5.1
8-043/S-16	18,100	8.0	5/8	0.71	1.65	6.65	1.81	1.54	8.4
8-043/S-20	28,300	12.5	3/4	0.83	2.01	7.87	2.20	1.85	14.8

★ Design factor 4:1 proof tested and certified

Tested acc. to EN 1677

Clevis Shackle. Code"YR"

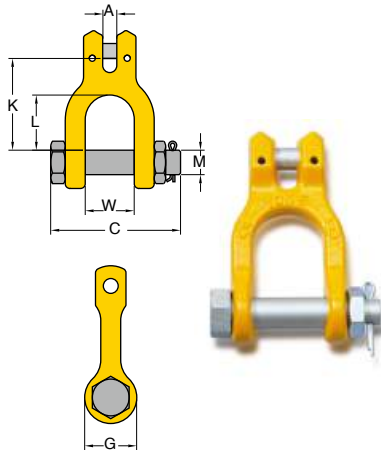


Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)							N.W. lbs
	lbs*	tonnes*		A	C	G	K	L	M	W	
8-066-07	4,500	2.0	1/4-5/16	0.35	3.11	1.34	2.32	1.38	0.63	1.30	0.9
8-066-10	7,100	3.15	3/8	0.43	3.66	1.57	3.07	1.89	0.79	1.46	1.8
8-066-13	12,000	5.3	1/2	0.55	4.65	1.73	3.86	2.52	0.87	1.93	3.1
8-066-16	18,100	8.0	5/8	0.71	5.55	2.13	4.41	2.72	1.10	2.36	5.5

★ Design factor 4:1 proof tested and certified

Tested acc. to EN 1677

Clevis C Hook. Code"FE"

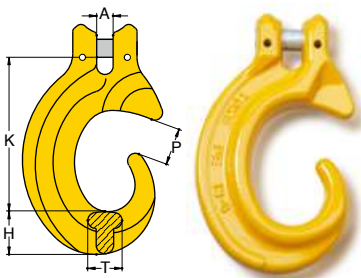

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	H	K	P	T	
8-097-07	4,500	2.0	1/4-5/16	0.35	0.87	3.15	0.75	0.71	1.1
8-097-10	7,100	3.15	3/8	0.43	1.02	4.13	1.02	0.94	2.0
8-097-13	12,000	5.3	1/2	0.55	1.34	5.43	1.34	1.26	4.6
8-097-16	18,100	8.0	5/8	0.71	1.77	6.69	1.50	1.46	7.9

★ Design factor 4:1 proof tested and certified

Tested acc. to EN 1677