


Eye Grab Hook. Code "YH"

Not for use with Omega Link Item. 8-018
No reduction of working load limit, thanks to supporting wings which prevent chain link deformation.

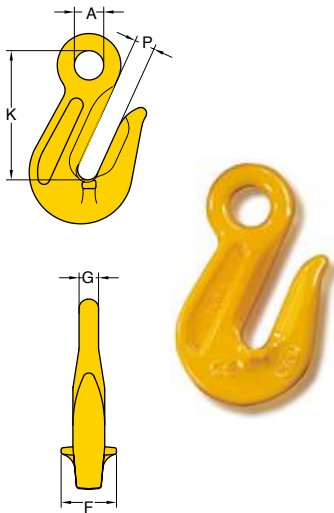


Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)					N.W.
	lbs*	tonnes*	inch	A	F	G	K	P	lbs
8-041-06	2,500	1.12	7/32	0.51	0.98	0.31	2.01	0.31	0.4
8-041-07	4,500	2.0	1/4-5/16	0.59	1.18	0.35	2.36	0.39	0.7
8-041-10	7,100	3.15	3/8	0.79	1.61	0.51	3.22	0.51	1.3
8-041-13	12,000	5.3	1/2	0.98	2.05	0.59	4.02	0.63	3.1
8-041-16	18,100	8.0	5/8	1.18	2.24	0.79	5.16	0.79	4.9
8-041-20	28,300	12.5	3/4	1.49	2.87	0.91	5.75	0.91	8.4
8-041-22	34,200	15.0	7/8	1.50	2.76	1.02	6.42	1.02	10.1
8-041-26	47,700	21.2	1	1.81	3.94	1.26	8.07	1.14	22.7
8-041-32	72,300	31.5	1-1/4	2.28	5.00	1.61	10.51	1.53	44.1

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Clevis Grab Hook. Code "YK"


Not for use with Omega Link Item. 8-018
No reduction of working load limit, thanks to supporting wings which prevent chain link deformation.

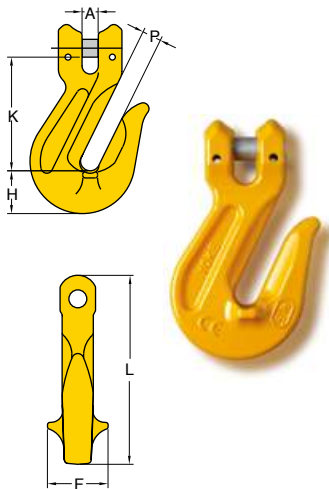

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)						N.W.
	lbs*	tonnes*	inch	A	F	H	K	L	P	lbs
8-042-06	2,500	1.12	7/32	0.28	0.98	0.63	1.61	3.11	0.31	0.4
8-042-07	4,500	2.0	1/4-5/16	0.35	1.18	0.98	2.17	3.66	0.39	0.7
8-042-10	7,100	3.15	3/8	0.47	1.61	1.38	3.03	5.04	0.51	1.8
8-042-13	12,000	5.3	1/2	0.59	2.09	1.65	3.82	5.98	0.63	3.5
8-042-16	18,100	8.0	5/8	0.67	2.22	1.77	4.47	7.66	0.79	6.2
8-042-20	28,300	12.5	3/4	0.91	3.86	2.13	4.88	8.54	0.91	11.0

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Clevis Clutch - Locking Type. Code "KCK"

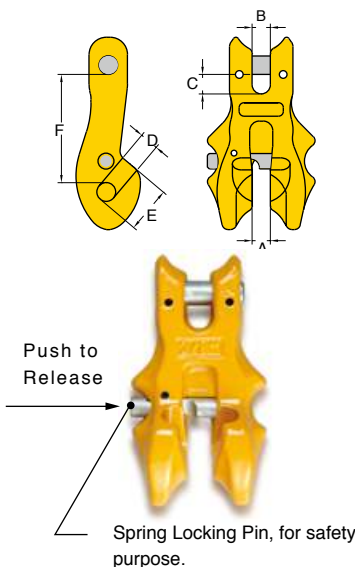

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)						N.W.
	lbs*	tonnes*	inch	A	B	C	D	E	F	lbs
8-061-06	2,500	1.12	7/32	0.28	0.28	0.39	0.28	0.71	1.97	0.7
8-061-07	4,500	2.0	1/4-5/16	0.37	0.37	0.40	0.39	0.94	2.22	1.1
8-061-10	7,100	3.15	3/8	0.47	0.45	0.45	0.47	1.10	2.59	2.0
8-061-13	12,000	5.3	1/2	0.59	0.59	0.63	0.63	1.54	3.46	4.6
8-061-16	18,100	8.0	5/8	0.71	0.83	0.72	0.75	1.90	4.06	8.2
8-061-20	28,300	12.5	3/4	0.91	0.91	0.91	0.83	2.17	5.18	12.6

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

