



Clevis Clutch. Code "KC"

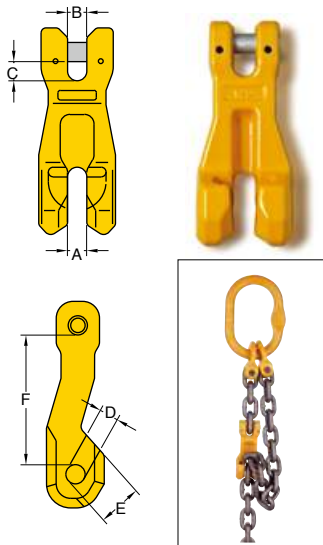

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A,B	C	D	E	F	
8-060-06	2,500	1.12	7/32	0.26	0.31	0.28	0.43	1.77	0.4
8-060-07	4,500	2.0	1/4-5/16	0.34	0.39	0.35	0.63	2.44	1.1
8-060-10	7,100	3.15	3/8	0.49	0.55	0.47	0.98	3.43	2.2
8-060-13	12,000	5.3	1/2	0.65	0.67	0.59	1.26	4.53	4.4
8-060-16	18,100	8.0	5/8	0.81	0.75	0.75	1.54	5.63	7.1
8-060-20	28,300	12.5	3/4	0.85	0.91	0.87	1.81	5.98	10.8

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677


Eye Shortening Hook. Code "KD"

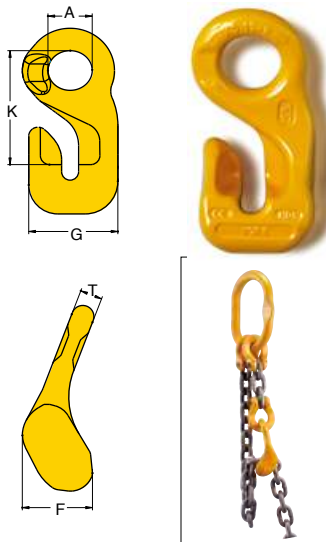

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	F	G	K	T	
8-062-06	2,500	1.12	7/32	0.79	1.38	1.50	2.13	0.39	0.4
8-062-07	4,500	2.0	1/4-5/16	0.98	1.73	1.93	2.64	0.47	1.1
8-062-10	7,100	3.15	3/8	1.26	2.24	2.36	2.95	0.55	2.0
8-062-13	12,000	5.3	1/2	1.57	2.87	3.15	4.17	0.75	4.2
8-062-16	18,100	8.0	5/8	1.97	3.46	3.82	5.16	0.87	7.7
8-062-20	28,300	12.5	3/4	2.36	4.21	4.49	6.30	1.06	12.8

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Clevis Traveling Clutch. Code "KR"

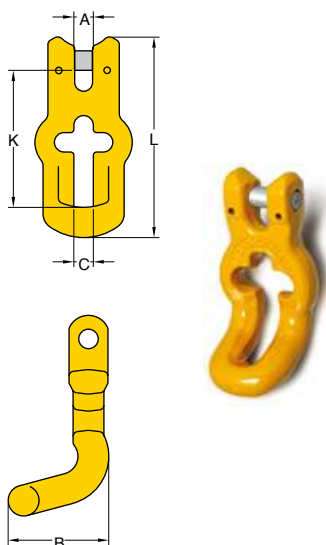

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	B	C	K	L	
8-064-06	2,500	1.12	7/32	0.28	1.22	0.31	2.52	3.39	0.4
8-064-07	4,500	2.0	1/4-5/16	0.39	1.73	0.39	2.87	4.09	0.9
8-064-10	7,100	3.15	3/8	0.43	2.40	0.51	3.23	4.76	1.5

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

