


Shortening Clutch. Code"EX"

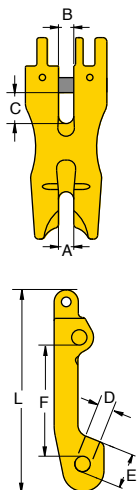


Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)							N.W.
	lbs*	tonnes*	inch	A	B	C	D	E	F	L	lbs
8-072-07	4,500	2.0	1/4-5/16	0.47	0.79	0.39	0.40	0.87	2.77	5.01	1.3
8-072-10	7,100	3.15	3/8	0.51	1.02	0.47	0.47	1.10	3.43	6.18	2.4
8-072-13	12,000	5.3	1/2	0.59	1.30	0.63	0.63	1.46	4.58	8.66	5.3
8-072-16	18,100	8.0	5/8	0.83	1.54	0.75	0.75	1.77	4.91	10.00	10.1

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Shortening Clutch

with Half Link

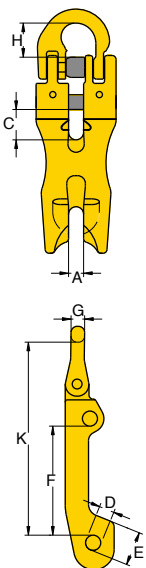

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)								N.W.
	lbs*	tonnes*	inch	A	C	D	E	F	G	H	K	lbs
8-078-07	4,500	2.0	1/4-5/16	0.47	0.79	0.39	0.91	2.76	0.89	0.35	5.04	1.5
8-078-10	7,100	3.15	3/8	0.51	1.02	0.47	1.14	3.43	1.06	0.50	6.06	2.9
8-078-13	12,000	5.3	1/2	0.59	1.30	0.63	1.46	4.53	1.38	0.62	7.99	6.2
8-078-16	18,100	8.0	5/8	0.83	1.54	0.75	1.81	5.63	1.51	0.75	9.76	11.7

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

