



Twist Eye Choke Hook. Code "KE"

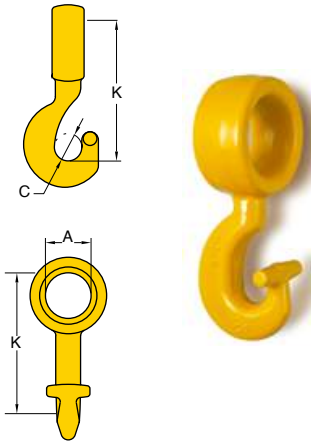


Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)			N.W.
	lbs*	tonnes*	inch	A	C	K	lbs
8-063-07	4,500	2.0	1/4-5/16	1.28	0.75	3.74	0.9
8-063-10	7,100	3.15	3/8	1.61	0.83	4.57	1.8
8-063-13	12,000	5.3	1/2	1.97	1.06	5.91	4.4
8-063-16	18,100	8.0	5/8	2.64	1.26	7.28	6.8

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677




Rapid Double End Choker. Code "KS"

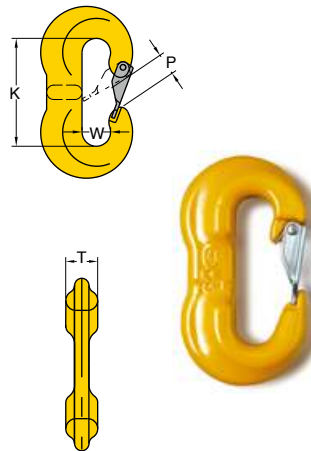


Item No.	Working Load Limit		For Wire Rope	Dimensions (inch)				N.W.
	lbs*	tonnes*	inch	K	P	T	W	lbs
8-076-0.5	1,100	0.5	5/16	2.83	0.75	0.47	0.71	0.9
8-076-01	2,200	1.0	1/2	2.83	0.75	0.79	0.71	1.1
8-076-02	4,400	2.0	5/8	3.50	0.75	1.10	1.02	2.4
8-076-04	8,800	4.0	3/4	4.29	0.98	1.26	1.34	4.2

★ Design factor 5:1 proof tested and certified.



Barrel Hook. Code "KK"

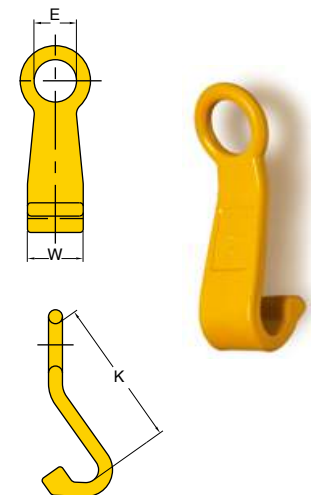

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)			N.W.
	lbs*	tonnes*	inch	E	K	W	lbs
8-071-07	3,500	1.6	1/4	1.50	5.24	1.97	2.0

★ Design factor 4:1 proof tested and certified.

