


Insulated Blank Swivels. Code "BSI"

with Ball Bearing

Individually tested to resist 1000 Volts insulated with Test Certificate.

Design for protection of overhead crane during welding operations on suspended loads.




1000 Volts Resistance

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)		N.W. lbs
	lbs*	tonnes*		D	L	
8-088-07	4,500	2.0	1/4-5/16	1.97	2.95	1.1
8-088-10	7,100	3.15	3/8	2.44	3.70	2.4
8-088-13	12,000	5.3	1/2	3.03	4.84	5.1
8-088-16	18,100	8.0	5/8	3.70	5.63	9.3
8-088-20	28,300	12.5	3/4	4.29	6.46	14.1


★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Coupling Master Link. Code "EC"




Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	H	K	T	W	
8-051-07	4,500	2.0	1/4-5/16	0.59	0.59	3.94	0.59	1.97	0.7
8-051-10	7,100	3.15	3/8	0.79	0.75	5.00	0.75	2.56	1.5
8-051-13	12,000	5.3	1/2	0.98	0.87	5.71	0.93	2.83	2.2
8-051-16	18,100	8.0	5/8	1.18	1.02	6.85	0.98	3.15	3.5
8-051-20	28,300	12.5	3/4	1.42	1.42	7.95	1.22	4.09	6.6

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677



Closed Coupling Master Link. Code "ECO"

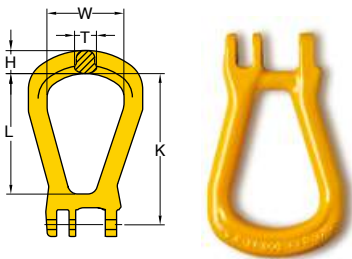

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		H	K	L	T	W	
8-052-07	4,500	2.0	1/4-5/16	0.59	3.94	3.07	0.59	1.97	0.7
8-052-10	7,100	3.15	3/8	0.75	5.00	3.98	0.75	2.56	1.5
8-052-13	12,000	5.3	1/2	0.87	5.71	4.45	0.91	2.83	2.4
8-052-16	18,100	8.0	5/8	1.02	6.85	5.39	0.98	3.15	3.8
8-052-20	28,300	12.5	3/4	1.42	7.95	6.50	1.22	4.09	6.6

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677