
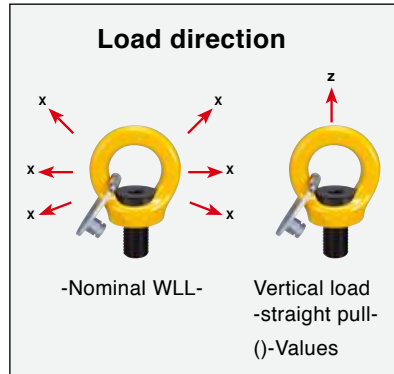



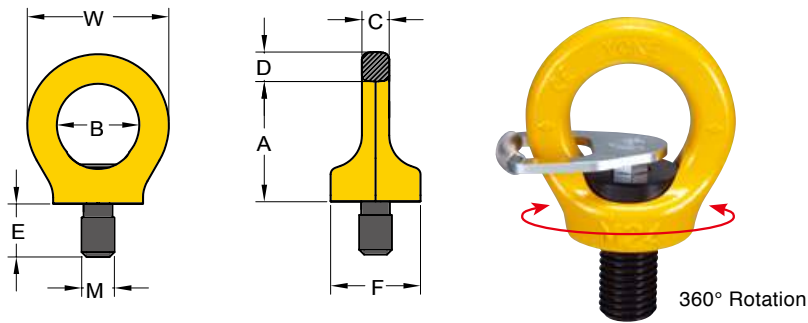

- Rotates through 360° adjustable in the direction of the load.
- Manufactured from alloy steel, quenched and tempered. Captive bolt with high WLL.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M)
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

» China Patent
 » French Patent
 » Australian Patent
 » Japanese Patent

Key Eye Point

Metric Thread (8-291K)



Item No.	Working Load Limit		Thread version			Dimensions							Torque in	N.W.
	tonnes		M	E	Pitch	A	B	C	D	F	S	W	Nm	kg
	X	(Z)	mm	mm	DIN13				mm					
8-291K-003	0.3	(1)	M 8	12	1.25	36	25	8	9	25	6	44	10	0.1
8-291K-004	0.4	(1)	M 10	15	1.5	36	25	8	9	25	6	44	10	0.1
8-291K-007	0.75	(2)	M 12	18	1.75	45	30	10	11	33	8	52	10	0.2
8-291K-015	1.5	(4)	M 16	24	2	52	35	14	13	35	10	61	30	0.3
8-291K-023	2.3	(6)	M 20	30	2.5	60	40	16	15	44	12	70	70	0.6
8-291K-032	3.2	(8)	M 24	36	3	72	48	19	18	52	14	84	150	1.0
8-291K-045	4.5	(12)	M 30	45	3.5	90	60	24	22	60	17	105	350	1.8
8-291K-070	7.0	(16)	M 36	54	4	109	72	29	27	76	22	126	410	3.2
8-291K-090	9.0	(24)	M 42	63	4.5	123	82	34	32	88	24	147	550	5.0
8-291K-120	12.0	(32)	M 48	72	5	144	94	38	37	104	27	168	550	7.6
8-291K-140	12.0	(32)	M 56	84	5.5	147	102	40	43	124	27	178	800	9.2
8-291K-150	12.0	(32)	M 64	95	6	147	102	40	43	124	27	178	800	10.0

* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.
 * Bolt in GEOMET™ finished on request