


Clevis Swivel Self Locking Hook. Code " KP "

with Ball Bearing, which performs full swivel under load




Item No.	Working Load Limit	For Grade 80 Chain	Dimensions (mm)					N.W.
	tonnes*	mm	A	H	K	P	T	kg
8-022-06	1.12	6	6	19	156	29	15	0.8
8-022-07	2.0	7, 8	9	24	188	34	20	1.3
8-022-10	3.15	10	11	30	215	44	26	2.2
8-022-13	5.3	13	14	39	275	52	30	4.6
8-022-16	8.0	16	18	49	323	60	36	7.9
8-022-20	12.5	18, 20	21	62	417	90	48	13.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Eye Swivel Hook. Code " YSW "

with Brass Bushing



Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)							N.W. kg
			A	B	D	H	K	P	T	
8-049-06	1.12	6	32	23	11	19	136	24	16	0.6
8-049-07	2.0	7,8	36	27	12	22	155	26	18	0.9
8-049-10	3.15	10	41	37	16	29	189	36	23	1.6
8-049-13	5.3	13	46	40	21	35	233	42	28	3.2
8-049-16	8.0	16	60	50	22	44	280	50	35	5.3
8-049-20	12.5	18, 20	74	82	25	65	356	56	49	9.5


★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

⚠ **WARNING INFORMATION:** This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see p.130 8-049N.



Eye Swivel Hook. Code "YSWN "

with Ball Bearing, which performs full swivel under load

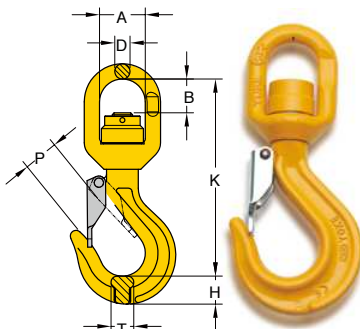

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)							N.W. kg
			A	B	D	H	K	P	T	
8-049N-06	1.12	6	32	23	11	19	136	24	16	0.6
8-049N-07	2.0	7, 8	36	27	12	22	155	26	18	0.9
8-049N-10	3.15	10	41	37	16	29	189	36	23	1.6
8-049N-13	5.3	13	46	40	21	35	233	42	28	3.4
8-049N-16	8.0	16	60	50	22	44	280	50	35	5.1
8-049N-20	12.5	18, 20	74	82	25	65	356	56	49	9.5

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677