


Grade 10 Short Link Chain

Hackett Grade 10 Lifting Chain is manufactured from alloy steel and it is 25% stronger than Grade 8 Chain.

Hackett Grade 10 Lifting Chain is embossed MA10 and also with class leading batch code marking.

The chain is proof load tested to 2.5 times working load limit and is supplied in a blue painted finish. The Hackett Grade 100 Chain is suitable for use in a temperature range of -40C up to 200C without reduction in working load limit.

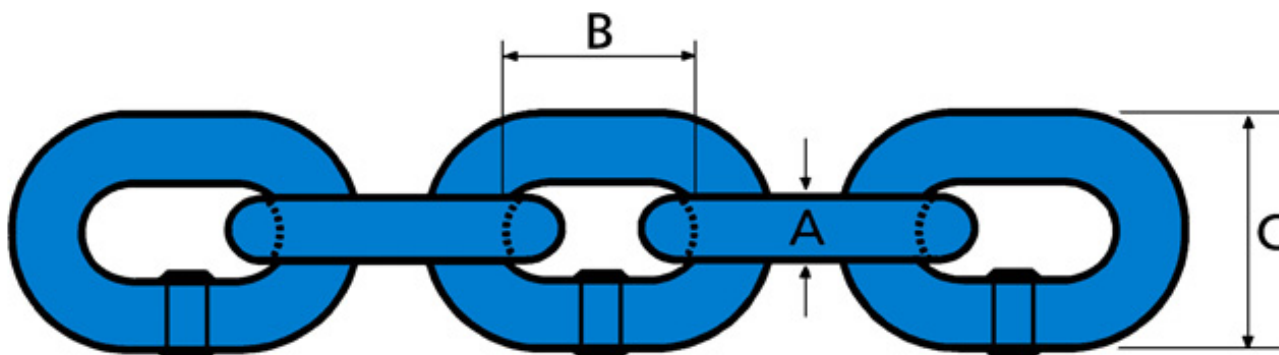

METRIC SPECIFICATIONS

Part Code	A mm	B mm	C mm	WLL tonnes	Kgs per metre	Mtr / Drum
ASV.060.5	6	18	25.9	1.4	0.8	500
ASV.080.5	8	24	29.6	2.5	1.5	350
ASV.100.5	10	30	37.0	4.0	2.2	250
ASV.130.5	13	39	48.1	6.7	3.8	150
ASV.160.5	16	48	59.2	10.0	5.8	100
ASV.200.5	20	60	74.0	16.0	9.1	60
ASV.220.5	22	66	81.4	19.0	11.00	50
ASV.260.5	26	78	96.2	26.5	15.3	25

IMPERIAL SPECIFICATIONS

Part Code	A inch	B inch	C inch	WLL lbs	lbs per metre	Mtr / Drum
ASV.060.5	0.24	0.70	1.02	3000	1.76	500
ASV.080.5	0.31	0.94	1.16	5500	3.30	350
ASV.100.5	0.39	1.18	1.45	8800	4.85	250
ASV.130.5	0.51	1.54	1.90	14700	8.37	150
ASV.160.5	0.63	1.89	2.33	22000	12.78	100
ASV.200.5	0.78	2.36	2.91	35200	20.06	60
ASV.220.5	0.86	2.59	3.20	41800	24.25	50
ASV.260.5	1.02	3.07	3.78	58400	33.73	25



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland, NE66 2EU. Tel : 01665 604200 Fax : 01665 604204
 William Hackett Chain Products Ltd Maypole Fields, Cradley, Halesowen, West Midlands, B63 2QE. Tel : 01384 569431 Fax : 01384 639157
 E-mail : info@williamhackett.co.uk Web : www.williamhackett.co.uk

