


Grade 8 Lifting Chain EN818-2

Hackett Grade 8 Lifting Chain is manufactured from alloy steel and complies fully with EN818-2.

Only chain fully compliant with all aspects of EN818-2 can be used in chain slings certified to EN818-4.

Hackett Grade 8 lifting chain is proof load tested to 2.5 times working load limit and is supplied in a black painted finish. The Hackett Grade 8 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit, reductions apply up to 400°C.

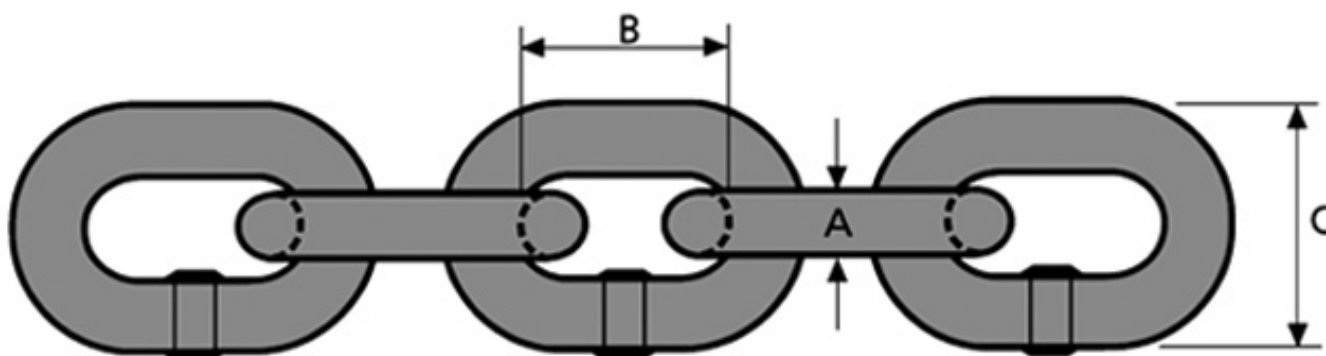

METRIC SPECIFICATIONS

Part code	Chain Size mm	A mm	B mm	C mm	WLL tonnes	Kgs per metre
AS1.070.5	7	7	21	25.9	1.50	1.10
AS1.080.5	8	8	24	29.6	2.00	1.50
AS1.100.5	10	10	30	37.0	3.15	2.20
AS1.130.5	13	13	39	48.1	5.30	3.80
AS1.160.5	16	16	48	59.2	8.00	5.80
AS1.200.5	20	20	60	74.0	12.50	9.10
AS1.220.5	22	22	66	81.4	15.00	11.00
AS1.260.5	26	26	78	96.2	21.20	15.30
AS1.320.5	32	32	96	118.0	31.50	23.20

IMPERIAL SPECIFICATIONS

Part code	Chain Size inch	A inch	B inch	C inch	WLL lbs	lbs per metre
AS1.070.5	1/4	0.27	0.83	1.02	3300	2.43
AS1.080.5	5/16	0.31	0.94	1.17	4410	3.30
AS1.100.5	3/8	0.39	1.18	1.46	6940	4.85
AS1.130.5	1/2	0.51	1.54	1.90	11680	8.38
AS1.160.5	5/8	0.63	1.89	2.33	17635	12.78
AS1.200.5	3/4	0.79	2.36	2.91	27555	20.06
AS1.220.5	7/8	0.87	2.60	3.20	33070	24.25
AS1.260.5	1	1.00	3.07	3.79	46740	33.73
AS1.320.5	1-1/4	1.25	3.78	4.65	69445	51.15



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland, NE66 2EU. Tel : 01665 604200 Fax : 01665 604204
 William Hackett Chain Products Ltd Maypole Fields, Cradley, Halesowen, West Midlands, B63 2QE. Tel : 01384 569431 Fax : 01384 639157
 E-mail : info@williamhackett.co.uk Web : www.williamhackett.co.uk

