




ROV: Remote Operated Vehicle

- YOKE ROV shackles are designed specifically for ROV application.
- YOKE ROV shackles are manufactured with the highest quality steel available.
- YOKE ROV shackles are individually stamped with the safe working load.
- YOKE ROV shackles are painted white to ensure ease of sight in water.

ROV Anchor Shackle

with Safety Pin
(ROV: Remote Operated Vehicle)

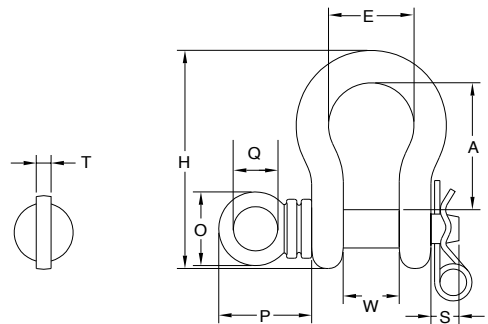

Item No.	Nominal Size		Working Load Limit	Dimensions (inch)									N.W.
	inch	mm		A	E	H	O	P	Q	S	T	W	
8-911-22	7/8	22	6.5	3.39	2.28	5.91	1.96	2.48	1.18	0.74	0.39	1.50	4.0
8-911-26	1	26	8.5	3.78	2.68	6.57	1.96	2.55	1.18	0.78	0.39	1.73	5.5
8-911-28	1 1/8	28	9.5	4.37	2.91	7.52	2.75	3.46	1.38	0.82	0.47	1.81	7.9
8-911-32	1 1/4	32	12.0	4.76	3.30	8.07	2.75	3.46	1.38	0.98	0.47	2.12	10.6
8-911-36	1 3/8	36	13.5	5.28	3.62	9.13	2.95	3.77	1.57	1.06	0.59	2.32	15.0
8-911-38	1 1/2	38	17.0	5.75	3.90	10.00	2.95	3.85	1.57	1.06	0.59	2.36	18.3
8-911-45	1 3/4	45	25.0	7.00	5.00	12.32	3.54	4.48	1.97	1.18	0.78	2.87	36.5
8-911-50	2	50	35.0	7.76	5.75	13.66	4.17	5.19	2.36	1.18	0.78	3.27	51.5

★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximum Proof Load is 2 times the Working Load Limit.

Item No.	Nominal Size		Working Load Limit	Dimensions (mm)									N.W.
	inch	mm		A	E	H	O	P	Q	S	T	W	
8-911-22	7/8	22	6.5	86	58	148	50	63	30	19	10	38	1.8
8-911-26	1	26	8.5	96	69	166	50	65	30	20	10	44	2.5
8-911-28	1 1/8	28	9.5	111	74	190	70	88	35	21	12	46	3.6
8-911-32	1 1/4	32	12.0	121	84	210	70	88	35	25	12	54	4.8
8-911-36	1 3/8	36	13.5	134	92	232	75	96	40	27	15	59	6.8
8-911-38	1 1/2	38	17.0	146	99	254	75	98	40	27	15	60	8.3
8-911-45	1 3/4	45	25.0	178	127	313	90	114	50	30	20	73	16.6
8-911-50	2	50	35.0	197	146	347	106	132	60	30	20	83	23.4

★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximum Proof Load is 2 times the Working Load Limit.