




ROV: Remote Operated Vehicle

- YOKE ROV hooks are designed specifically for ROV application.
- YOKE ROV hooks are manufactured with the highest quality steel available.
- YOKE ROV hooks are painted white to ensure ease of sight in water.

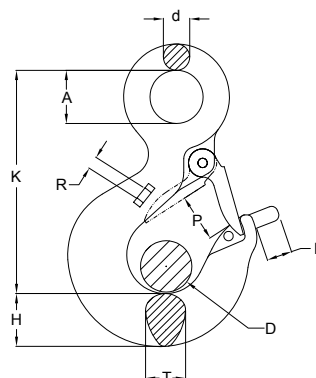

## ROV Eye Sling Hook

(ROV: Remote Operated Vehicle)

| Item No. | Working Load Limit | Dimensions (inch) |      |      |      |      |       |      |      |      | N.W. |
|----------|--------------------|-------------------|------|------|------|------|-------|------|------|------|------|
|          | tonnes*            | A                 | D    | d    | E    | H    | K     | P    | R    | T    | lbs  |
| 8-921-03 | 3.0                | 1.26              | 0.98 | 0.59 | 0.78 | 1.14 | 4.80  | 0.98 | 0.31 | 0.95 | 2.2  |
| 8-921-05 | 5.0                | 1.57              | 1.22 | 0.71 | 0.78 | 1.46 | 5.87  | 1.22 | 0.31 | 1.22 | 4.6  |
| 8-921-07 | 7.0                | 2.00              | 1.54 | 0.95 | 0.78 | 1.82 | 7.56  | 1.54 | 0.31 | 1.46 | 8.8  |
| 8-921-11 | 11.0               | 2.44              | 2.24 | 1.10 | 1.18 | 2.28 | 9.13  | 2.24 | 0.31 | 1.89 | 15.4 |
| 8-921-15 | 15.0               | 2.84              | 2.44 | 1.26 | 1.18 | 2.60 | 10.10 | 2.44 | 0.31 | 2.20 | 20.7 |
| 8-921-22 | 22.0               | 3.54              | 3.19 | 1.57 | 1.96 | 3.01 | 12.50 | 3.19 | 0.39 | 2.68 | 40.9 |
| 8-921-30 | 30.0               | 3.54              | 3.27 | 1.77 | 1.96 | 3.62 | 14.10 | 3.27 | 0.39 | 2.99 | 68.6 |

★ Minimum Ultimate Load is 4 times the Working Load Limit.  
Maximun Proof Load is 2 times the Working Load Limit.

| Item No. | Working Load Limit | Dimensions (mm) |    |    |    |    |     |    |    |    | N.W. |
|----------|--------------------|-----------------|----|----|----|----|-----|----|----|----|------|
|          | tonnes             | A               | D  | d  | E  | H  | K   | P  | R  | T  | kg   |
| 8-921-03 | 3.0                | 32              | 25 | 15 | 20 | 29 | 122 | 25 | 8  | 24 | 1.0  |
| 8-921-05 | 5.0                | 40              | 31 | 18 | 20 | 37 | 149 | 31 | 8  | 31 | 2.1  |
| 8-921-07 | 7.0                | 51              | 39 | 24 | 20 | 46 | 192 | 39 | 8  | 37 | 4.0  |
| 8-921-11 | 11.0               | 62              | 57 | 28 | 30 | 58 | 232 | 57 | 8  | 48 | 7.0  |
| 8-921-15 | 15.0               | 72              | 62 | 32 | 30 | 66 | 256 | 62 | 8  | 56 | 9.4  |
| 8-921-22 | 22.0               | 90              | 81 | 40 | 50 | 77 | 318 | 81 | 10 | 68 | 18.6 |
| 8-921-30 | 30.0               | 90              | 83 | 45 | 50 | 92 | 357 | 83 | 10 | 76 | 31.2 |

★ Minimum Ultimate Load is 4 times the Working Load Limit.  
Maximun Proof Load is 2 times the Working Load Limit.