


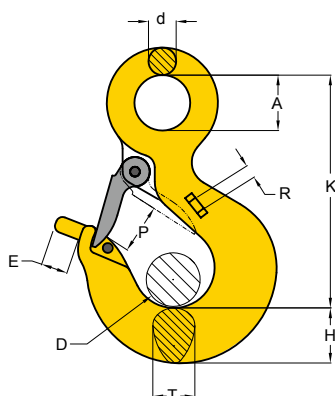

ROV: Remotely Operated Vehicle

- Forged alloy steel, quenched and tempered.
- Designed specifically for ROV application.
- Individually stamped with the Working Load Limit.
- Shackle Bows are painted yellow to ensure ease of sight in water.

ROV Eye Sling Hook (ROV: Remotely Operated Vehicle)

Item No.	Working Load Limit	Dimensions (inch)									N.W.
	tonnes*	A	D	d	E	H	K	P	R	T	lbs
8-921-03	3.0	1.26	0.98	0.59	0.78	1.14	4.80	0.98	0.31	0.95	2.2
8-921-05	5.0	1.57	1.22	0.71	0.78	1.46	5.87	1.22	0.31	1.22	4.6
8-921-07	7.0	2.00	1.54	0.95	0.78	1.82	7.56	1.54	0.31	1.46	8.8
8-921-11	11.0	2.44	2.24	1.10	1.18	2.28	9.13	2.24	0.31	1.89	15.4
8-921-15	15.0	2.84	2.44	1.26	1.18	2.60	10.10	2.44	0.31	2.20	20.7
8-921-22	22.0	3.54	3.19	1.57	1.96	3.01	12.50	3.19	0.39	2.68	40.9
8-921-30	30.0	3.54	3.27	1.77	1.96	3.62	14.10	3.27	0.39	2.99	68.6

★ Minimum Ultimate Load is 4 times the Working Load Limit.
Maximum Proof Load is 2 times the Working Load Limit.

Item No.	Working Load Limit	Dimensions (mm)									N.W.
	tonnes	A	D	d	E	H	K	P	R	T	kg
8-921-03	3.0	32	25	15	20	29	122	25	8	24	1.0
8-921-05	5.0	40	31	18	20	37	149	31	8	31	2.1
8-921-07	7.0	51	39	24	20	46	192	39	8	37	4.0
8-921-11	11.0	62	57	28	30	58	232	57	8	48	7.0
8-921-15	15.0	72	62	32	30	66	256	62	8	56	9.4
8-921-22	22.0	90	81	40	50	77	318	81	10	68	18.6
8-921-30	30.0	90	83	45	50	92	357	83	10	76	31.2

★ Minimum Ultimate Load is 4 times the Working Load Limit.
Maximum Proof Load is 2 times the Working Load Limit.