


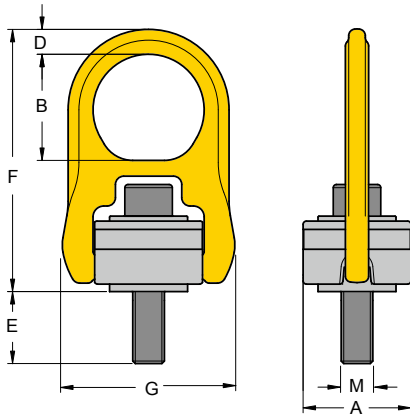

- Rotates through 360° and pivot 180°, rated at 100% at 90° angle.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolt are Metric thread (ASME / ANSI B18.3.1M).
- Individually proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

- » Taiwan Patent
- » China Patent

Hoist Ring

with Alloy Steel Washer

UNC Thread (8-204)

Item No.	Working Load Limit	Thread	Dimensions (inch)						Torque in	N.W.
	lbs*		A	B	D	E	F	G	ft.lbs	lbs
8-204-004	800	5/16 - 18UNC	1.57	1.61	0.35	0.71	4.02	2.56	10	0.9
8-204-005	1000	3/8 - 16UNC	1.57	1.61	0.35	0.71	4.02	2.56	16	0.9
\$ 8-204-010	2500	1/2 - 13UNC	2.56	2.32	0.59	0.75	6.26	4.13	16	3.7
8-204-010L	2500	1/2 - 13UNC	2.56	2.32	0.59	1.26	6.26	4.13	38	3.7
\$ 8-204-019	4000	5/8 - 11UNC	2.56	2.32	0.59	0.74	6.26	4.13	38	4.0
8-204-019L	4000	5/8 - 11UNC	2.56	2.32	0.59	1.75	6.26	4.13	81	4.0
\$ 8-204-021	5000	3/4 - 10UNC	2.56	2.87	0.59	1.24	6.26	4.13	81	4.0
8-204-021L	5000	3/4 - 10UNC	2.56	2.87	0.59	1.73	6.26	4.13	136	4.2
\$ 8-204-030	7000	3/4 - 10UNC	3.35	2.87	0.59	0.87	6.26	5.28	136	8.8
8-204-030L	7000	3/4 - 10UNC	3.35	2.87	0.87	1.87	8.03	5.28	136	9.5
\$ 8-204-042	8000	7/8 - 9UNC	3.35	2.87	0.87	1.43	8.03	5.28	136	9.3
8-204-042L	8000	7/8 - 9UNC	3.35	2.87	0.87	2.37	8.03	5.28	312	9.7
\$ 8-204-045	10000	1 - 8UNC	3.35	2.87	0.87	1.36	8.03	5.28	312	9.5
8-204-045L	10000	1 - 8UNC	3.35	2.87	0.87	2.36	8.03	5.28	637	10.1
8-204-070	15000	1 1/4 - 7UNC	3.95	3.15	1.00	2.25	8.58	6.30	1005	14.5
8-204-125	24000	1 1/2 - 6UNC	4.72	4.29	1.38	2.17	12.09	8.66	1005	35.2
8-204-135	30000	2 - 4.5UNC	4.72	4.29	1.38	3.01	12.09	8.66	1350	35.2

★ Design Factor 5:1

\$ Long Bolts are designed for soft metal work piece.

** Bolt in GEOMET® finished on request