


- Pivots through 180°.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.

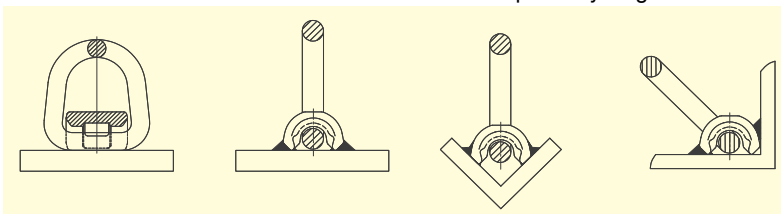

Weld-on Point. Code "DAA".

Designed with spring, stop at any angle

Item No.	Working Load Limit	Dimensions (mm)									N.W.
	tonnes	A	B	D	F	H	K	L	N	R	kg
8-057-1T	1.0	83	14	14	27	57	40	109	24	50	0.5
8-057-3T	3.0	98	17	17	31	53	48	114	29	58	0.9
8-057-5T	5.0	120	22	22	41	77	63	157	33	64	1.3
8-057-8T	8.0	121	26	26	54	69	73	169	34	61	2.6
8-057-10T	10.0	146	20	30	54	88	73	191	41	75	3.1

* Design factor 5:1

Item No.	Working Load Limit	Dimensions (inch)									N.W.
	lbs	A	B	D	F	H	K	L	N	R	lbs
8-057-1T	2200	3.27	0.55	0.55	1.06	2.24	1.57	4.29	0.94	1.97	1.1
8-057-3T	6600	3.86	0.67	0.67	1.22	2.09	1.89	4.49	1.14	2.28	2.0
8-057-5T	11000	4.72	0.87	0.87	1.61	3.03	2.48	6.18	1.30	2.52	2.9
8-057-8T	17600	4.76	1.02	1.02	2.13	2.72	2.87	6.65	1.34	2.40	5.7
8-057-10T	22000	5.75	0.79	0.79	2.13	3.46	2.87	7.52	1.61	2.95	6.2

* Design factor 5:1