




- Rotates through 360° and pivot 90°.
- Manufactured from alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Certified by DGUV GS-OA 15-04.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M), specification is alloy socket head screw per DIN EN ISO 4762.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

Lifting Point

Metric Thread (8-211)

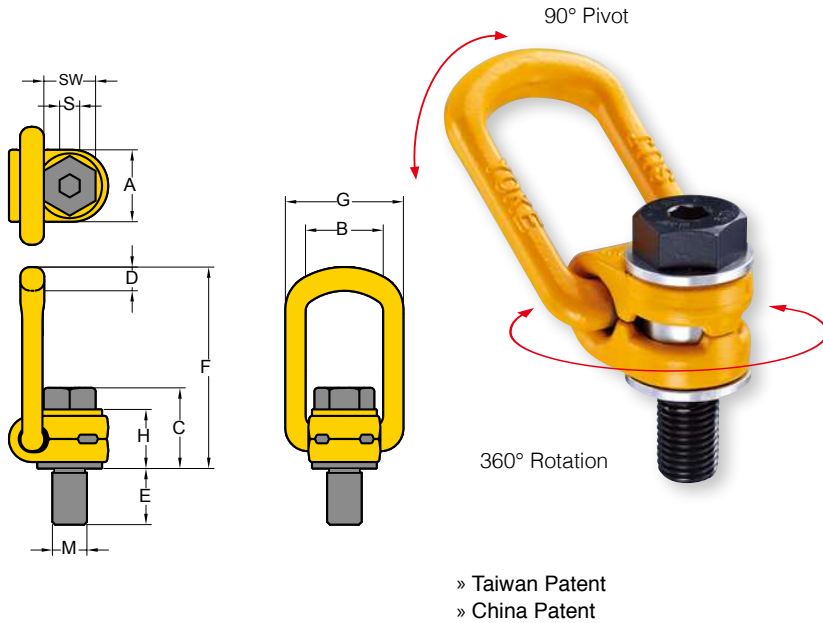

Item No.	Working Load Limit	Thread version			Dimensions									Torque in	N.W.
		M	E	Pitch	A	B	C	D	F	G	H	S	SW		
	tonnes	mm	mm	DIN13				mm							
8-211-003	0.3	M 8	11	1.25	30	35	35	10	85	55	29	6	13	30	0.2
8-211-006	0.63	M 10	16	1.5	30	35	36	10	85	55	29	6	17	60	0.3
8-211-010	1	M 12	18	1.75	33	37	44	14	98	57	36	8	19	100	0.5
8-211-012	1.2	M 14	21	2	33	37	45	14	98	57	36	10	22	120	0.5
8-211-015	1.5	M 16	24	2	33	37	46	14	98	57	36	10	24	150	0.5
8-211-020	2	M 18	26	2	50	54	57	17	140	82	44	12	30	200	1.3
8-211-025	2.5	M 20	30	2.5	50	54	57	17	140	82	44	12	30	250	1.3
8-211-040	4	M 24	36	3	50	54	59	17	140	82	44	14	36	400	1.4
8-211-042	4	M 27	38	3	60	65	79	23	170	99	62	17	41	400	2.8
8-211-050	5	M 30	48	3.5	60	65	81	23	170	99	62	17	46	500	3.1
8-211-070	7	M 36	54	4	60	65	88	23	178	99	65	22	55	700	3.3
8-211-080	8	M 36	62	4	77	85	101	27	225	124	78	22	55	800	5.8
8-211-100	10	M 42	72	4.5	77	85	104	27	225	124	78	24	65	1000	6.3
8-211-150	15	M 42	63	4.5	95	104	112	36	256	158	86	24	65	1500	10.8
8-211-200	20	M 48	72	5	95	104	120	36	259	158	90	27	75	2000	11.6
8-211-220	22 	M 56	84	5.5	95	104	128	36	259	158	90	27	89	2100	15.0
8-211-225	22.5 	M 64	100	6	113	104	133	36	259	158	90	32	95	2200	16.3

* Design Factor 4:1

* Bolt in GEOMET® finished on request