


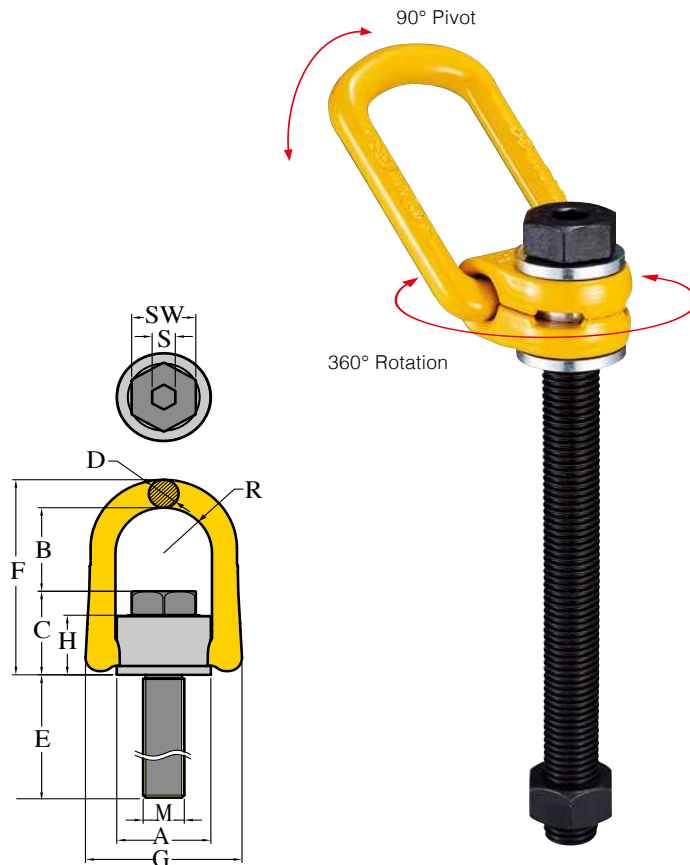

- Rotates through 360° and pivots 90°.
- Manufactured from alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M), specification is alloy socket head screw per DIN EN ISO 4762.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

» Taiwan Patent
» China Patent

Lifting Point Long Bolt

Metric Thread (8-211)



Item No.	Working Load Limit	Thread version			Dimensions									Torque	
		M	E	Pitch	A	B	C	D	F	G	H	S	SW	in	N.W.
	tonnes	mm	mm	DIN13					mm					Nm	kg
8-211-003/105L	0.3	M 8	76	1.25	30	35	35	10	85	55	29	6	13	30	0.3
8-211-006/125L	0.63	M 10	96	1.5	30	35	36	10	85	55	29	6	17	60	0.4
8-211-010/150L	1	M 12	114	1.75	33	37	44	14	98	57	36	8	19	100	0.6
8-211-015/185L	1.5	M 16	149	2	33	37	46	14	98	57	36	10	24	150	0.7
8-211-025/230L	2.5	M 20	186	2.5	50	54	57	17	140	82	44	12	30	250	1.7
8-211-040/265L	4	M 24	221	3	50	54	59	17	140	82	44	14	36	400	2.1
8-211-050/340L	5	M 30	278	3.5	60	65	81	23	170	99	62	17	46	500	4.3
8-211-080/300L	8	M 36	222	4	77	85	101	27	225	124	78	22	55	800	7.3
8-211-100/350L	10	M 42	272	4.5	77	85	104	27	225	124	78	24	65	1000	8.7
8-211-150/350L	15	M 42	264	4.5	95	104	112	36	256	158	86	24	65	1500	13.1
8-211-200/385L	20	M 48	295	5	95	104	120	36	259	158	90	27	75	2000	15.2

* Design Factor 4:1

* Bolt in GEOMET® finished on request