


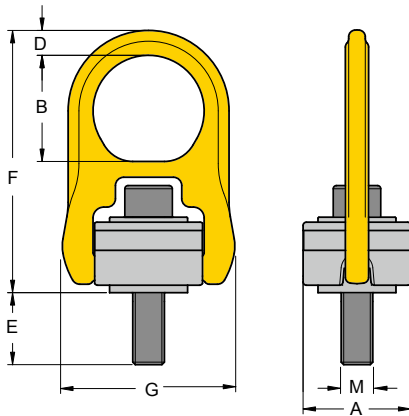

- Rotates through 360° and pivots 180°, and simultaneously allows lifting from any direction.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M), specification is alloy socket head screw per DIN EN ISO 4762.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required

- » Taiwan Patent
- » China Patent

Hoist Ring

with Alloy Steel Washer
Metric Thread (8-203)

Item No.	Working Load Limit		Thread	Dimensions (mm)						Torque in	N.W.		
	tonnes			M	A	B	D	E	F	G		Nm	kg
	5 : 1	4 : 1											
	8-203-004	0.40	0.50	M 8 x 1.25	40	41	9	17	102	65	10	0.4	
	8-203-005	0.45	0.55	M10 x 1.5	40	41	9	11	102	65	16	0.5	
\$	8-203-005L	0.45	0.55	M10 x 1.5	40	41	9	26	102	65	16	0.5	
	8-203-010	1.05	1.30	M12 x 1.75	65	64	15	15	158	105	38	1.7	
\$	8-203-010L	1.05	1.30	M12 x 1.75	65	64	15	30	158	105	38	1.7	
	8-203-019	1.90	2.40	M16 x 2	65	64	15	20	158	105	81	1.8	
\$	8-203-019L	1.90	2.40	M16 x 2	65	64	15	35	158	105	81	1.8	
	8-203-021	2.15	2.70	M20 x 2.5	65	64	15	25	158	105	136	1.8	
\$	8-203-021L	2.15	2.70	M20 x 2.5	65	64	15	45	158	105	136	1.9	
	8-203-030	3.00	3.75	M20 x 2.5	85	79	19	25	204	134	136	4.0	
\$	8-203-030L	3.00	3.75	M20 x 2.5	85	79	19	45	204	134	136	5.2	
	8-203-042	4.20	5.25	M24 x 3	85	79	19	26	204	134	312	4.2	
\$	8-203-042L	4.20	5.25	M24 x 3	85	79	19	56	204	134	312	4.3	
	8-203-070	7.00	8.75	M30 x 3.5	100	100	25	81	241	160	637	6.6	
	8-203-110	11.00	13.75	M36 x 4	120	111	30	76	286	194	1005	15.0	
	8-203-125	12.50	15.60	M42 x 4.5	120	111	30	65	286	220	1005	16.0	
	8-203-135	13.50	16.90	M48 x 5	120	111	30	70	286	220	1350	16.0	
	8-203-155	15.50	19.40	M56 x 5.5	138	109	34	79	308	241	1350	19.1	
	8-203-223	22.30	27.90	M64 x 6	138	100	38	98	312	241	2847	23.0	

* Design Factor 4:1

§ Long Bolts are designed for soft metal work piece.