


Eye Nuts

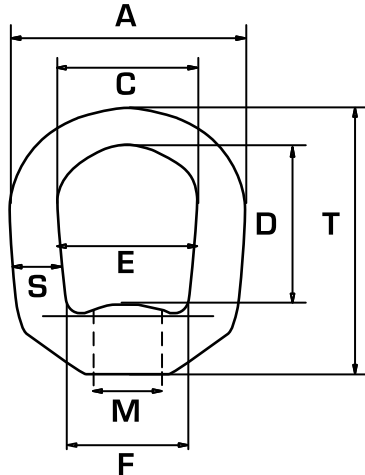

Size No.	Std. Tap. M	Dimensions (in)							Max. Tap. Size Possible	WLL (lbs)	Weight (lbs)
		A	C	D	E	F	S	T			
1	1/4	1 - 1/4	3/4	1 - 1/16	21/32	1/2	1/4	1 - 11/16	3/8	520	0.09
1A	5/16	1 - 1/4	3/4	1 - 1/16	21/32	1/2	1/4	1 - 11/16	3/8	850	0.09
2	3/8	1 - 5/8	1	1 - 1/4	3/4	9/16	5/16	2 - 1/16	7/16	1,250	0.18
3	7/16	2	1 - 1/4	1 - 1/2	1	13/16	3/8	2 - 1/2	1/2	1,700	0.29
3A	1/2	2	1 - 1/4	1 - 1/2	1	13/16	3/8	2 - 1/2	—	2,250	0.29
4	5/8	2 - 1/2	1 - 1/2	2	1 - 3/16	1	1/2	3 - 3/16	3/4	3,600	0.58
5	3/4	3	1 - 3/4	2 - 3/8	1 - 3/8	1 - 1/8	5/8	3 - 7/8	7/8	5,200	1.00
5	7/8	3 - 1/2	2	2 - 5/8	1 - 5/8	1 - 5/16	3/4	4 - 5/16	1	7,200	1.70
7	1	4	2 - 1/4	3 - 1/16	1 - 7/8	1 - 9/16	7/8	5	1 - 1/4	10,000	2.75
7A	1 - 1/8	4	2 - 1/4	3 - 1/16	1 - 7/8	1 - 9/16	7/8	5	1 - 1/4	12,300	2.75
8	1 - 1/4	4 - 1/2	2 - 1/2	3 - 1/2	1 - 15/16	1 - 7/8	1	5 - 3/4	1 - 1/2	15,500	3.85
9	1 - 3/8	5	2 - 3/4	2 - 3/4	2	2	1 - 1/8	6 - 1/4	1 - 1/2	18,500	5.00
10	1 - 1/2	5 - 5/8	3 - 1/8	4	2 - 3/8	2 - 1/4	1 - 1/4	6 - 3/4	1 - 3/4	22,500	6.70
11	2	7	4	6 - 1/4	4	3 - 3/8	1 - 1/2	10	2 - 3/4	40,000	18.70

Galvanized Steel Hot