


Regular Nut Eye Bolts

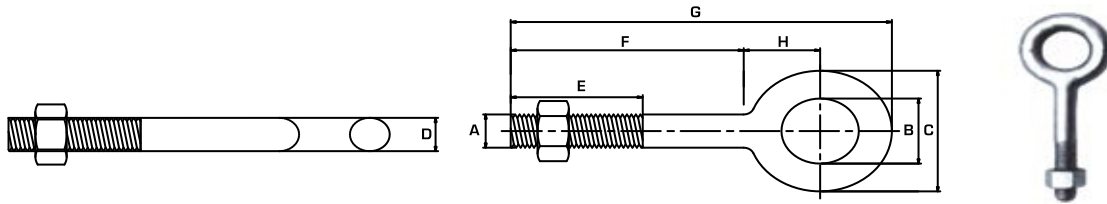

Shank Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)							
			A	B	C	D	E	F	G	H
1/4x2	500	6.00	0.25	0.50	1.00	0.25	1.50	2.00	3.06	0.56
1/4x4	500	13.50	0.25	0.50	1.00	0.25	2.50	4.00	5.06	0.56
5/16x2 1/4	800	18.75	0.31	0.62	1.25	0.31	1.50	2.25	3.56	0.69
5/16x4 1/4	800	25.00	0.31	0.62	1.25	0.31	2.50	4.25	5.56	0.69
3/8x2 1/2	1200	24.33	0.38	0.75	1.50	0.38	1.50	2.50	4.12	0.88
3/8x4 1/2	1200	37.50	0.38	0.75	1.50	0.38	2.50	4.50	6.12	0.88
3/8x6	1200	43.75	0.38	0.75	1.50	0.38	2.50	6.00	7.62	0.88
1/2x3 1/4	2200	50.00	0.50	1.00	2.00	0.50	1.50	3.25	5.38	1.12
1/2x6	2200	62.50	0.50	1.00	2.00	0.50	3.00	6.00	8.12	1.12
1/2x8	2200	75.00	0.50	1.00	2.00	0.50	3.00	8.00	10.12	1.12
1/2x10	2200	88.00	0.50	1.00	2.00	0.50	3.00	10.00	12.12	1.12
1/2x12	2200	100.00	0.50	1.00	2.00	0.50	3.00	12.00	14.12	1.12
5/8x4	3500	101.25	0.62	1.25	2.50	0.62	2.00	4.00	6.69	1.44
5/8x6	3500	120.00	0.62	1.25	2.50	0.62	3.00	6.00	8.69	1.44
5/8x8	3500	131.00	0.62	1.25	2.50	0.62	3.00	8.00	10.69	1.44
5/8x10	3500	162.50	0.62	1.25	2.50	0.62	3.00	10.00	12.69	1.44
5/8x12	3500	175.00	0.62	1.25	2.50	0.62	4.00	12.00	14.69	1.44
3/4x4 1/2	5200	185.90	0.75	1.50	3.00	0.75	2.00	4.50	7.69	1.69
3/4x6	5200	180.00	0.75	1.50	3.00	0.75	3.00	6.00	9.19	1.69
3/4x8	5200	200.00	0.75	1.50	3.00	0.75	3.00	8.00	11.19	1.69
3/4x10	5200	237.50	0.75	1.50	3.00	0.75	3.00	10.00	13.19	1.69
3/4x12	5200	251.94	0.75	1.50	3.00	0.75	4.00	12.00	15.19	1.69
3/4x15	5200	300.00	0.75	1.50	3.00	0.75	5.00	15.00	18.19	1.69
7/8x5	7200	275.00	0.88	1.75	3.50	0.88	2.50	5.00	8.75	2.00
7/8x8	7200	325.00	0.88	1.75	3.50	0.88	4.00	8.00	11.75	2.00
7/8x12	7200	400.00	0.88	1.75	3.50	0.88	4.00	12.00	15.75	2.00
1x6	10000	425.00	1.00	2.00	4.00	1.00	3.00	6.00	10.31	2.31
1x9	10000	452.00	1.00	2.00	4.00	1.00	4.00	9.00	13.31	2.31
1x12	10000	550.00	1.00	2.00	4.00	1.00	4.00	12.00	16.31	2.31
1x18	10000	650.00	1.00	2.00	4.00	1.00	7.00	18.00	22.31	2.31
1 1/4x8	15200	750.00	1.25	2.50	5.00	1.25	4.00	8.00	13.38	2.88
1 1/4x12	15200	900.00	1.25	2.50	5.00	1.25	4.00	12.00	17.38	2.88
1 1/4x20	15200	1150.00	1.25	2.50	5.00	1.25	6.00	20.00	25.38	2.88

Hot dip galvanized • Forged steel, quenched and tempered

www.dominionriggingproducts.com

