


## Eye Slip Hooks with and w/out latch



| Size of Chain (in) | Working Load Limit (lbs) |       | Dimensions (in.) |      |      | Weight (lbs) | Weight w/ Latch (Lbs) |
|--------------------|--------------------------|-------|------------------|------|------|--------------|-----------------------|
|                    | Carbon                   | Alloy | A                | B    | C    |              |                       |
| 1/4                | 1950                     | 2750  | 0.50             | 0.94 | 2.56 | 0.40         | 0.42                  |
| 5/16               | 2875                     | 4300  | 0.63             | 1.06 | 2.95 | 0.70         | 0.72                  |
| 3/8                | 4000                     | 5250  | 0.72             | 1.31 | 3.36 | 1.00         | 1.03                  |
| 7/16               | 5000                     | 7000  | 0.81             | 1.56 | 3.88 | 1.60         | 1.64                  |
| 1/2                | 6500                     | 9000  | 0.94             | 1.69 | 4.28 | 2.40         | 2.45                  |
| 5/8                | 9250                     | 13500 | 1.13             | 2.00 | 5.22 | 4.00         | 4.13                  |
| 3/4                | 12500                    | 19250 | 1.38             | 2.13 | 5.80 | 6.50         | 6.76                  |

G43 forged carbon steel  
G70 forged alloy steel  
Quenched and tempered

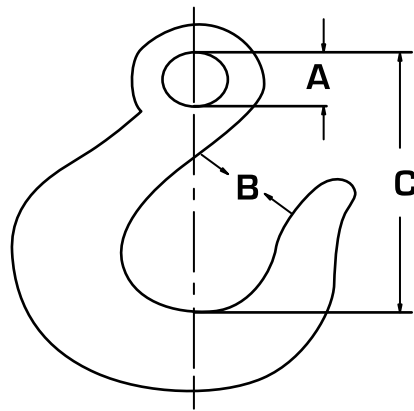