


Insulated Blank Swivels. Code " BSI "

with Ball Bearing

Individually tested to resist 1000 Volts insulated with Test Certificate.

Design for protection of overhead crane during welding operations on suspended loads.




1000 Volts Resistance

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)			N.W. kg
			L	D	W	
8-088N-07	2.0	7, 8	75	48	50	0.7
8-088N-10	3.15	10	97	58	62	1.3
8-088N-13	5.3	13	123	74	78.5	2.7
8-088N-16	8.0	16	143	90	95	4.7
8-088N-20	12.5	18, 20	164	105	110	7.0


★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Coupling Master Link. Code "EC"

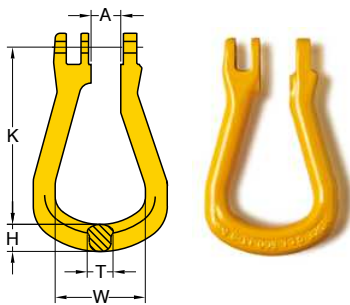


Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)					N.W. kg
			A	H	K	T	W	
8-051-07	2.0	7, 8	15	15	100	15	50	0.3
8-051-10	3.15	10	19	19	127	19	66	0.6
8-051-13	5.3	13	25	22	145	23	72	1.0
8-051-16	8.0	16	30	26	174	25	80	1.6
8-051-20	12.5	18, 20	36	36	202	31	104	2.8

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677



Closed Coupling Master Link. Code "ECO"



Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)					N.W. kg
			H	K	L	T	W	
8-052-07	2.0	7, 8	15	100	78	15	50	0.3
8-052-10	3.15	10	19	127	101	19	65	0.7
8-052-13	5.3	13	22	145	113	23	72	1.1
8-052-16	8.0	16	26	174	137	25	80	1.7
8-052-20	12.5	18, 20	36	202	165	31	104	3.0

★ Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677